


## DIMENSIONS AND NOMINAL VALUES

	Volum. del.	Depth of immer.	Pipe conn.	Weight	Power	Voltage	Fre- quency	Rated current	Revo- lution
TYPE	l/min	h(mm)	G	kg	kw	V(ΔY)	Hz	A	rpm
FP 40 15	30*	150	G 3/4	7.8	0.40	230/400	50	1.9/1.1	2820
FP 40 20		200		8.0					
FP 40 25		250		8.5					
FP 40 30		300		8.6					

Volumetric delivery \* is measured at 2m water height. ( $\pm$  % 10)

## Performance Curve

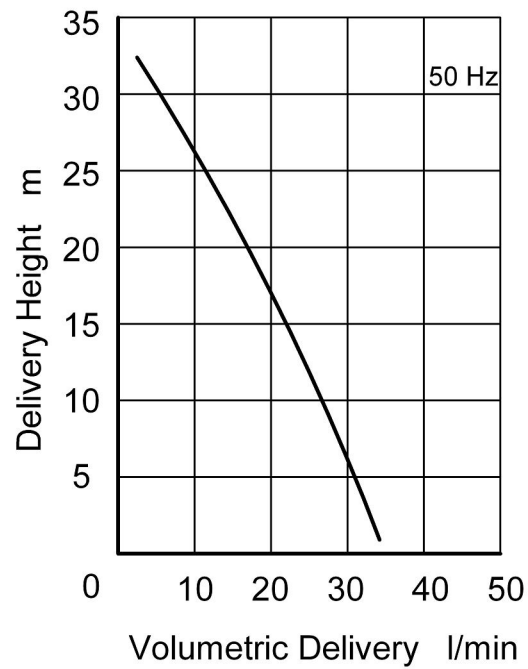

Kinematic viscosity : 90 mm<sup>2</sup>/s

Operating temperature : 0.....60 °C

## PROPERTIES:

- FP 40 Pump series are designed for circulation of cutting and chemical fluids.
- They serve as cooling and lubrication units on machine tools and automatic sews, etc.
- The shaft of the FP 40 Pump is made of engineering steel.
- The impeller of the FP 40 Pump is made of brass.
- The main body and pump intake cover of standart FP 40 Pump are cast iron.
- Standard FP 40 Pump has a three-phase motor . On demand, it can be equipped with a single-phase motor and other voltage, frequency.

THE DIMENSIONS OF THE PUMPS CONFORMS TO EN 12157 SPECIFICATIONS.

Address: BOSB, Bakır Piriñ Sanayicileri Sitesi

Menekşe Cad.No:1 - 34524 Beylikdüzü/İSTANBUL-TURKEY

Tel: 90 212 284 64 00

web: [www.miksanmotor.com](http://www.miksanmotor.com)

Fax: 90 212 279 55 67

e-mail: [info@miksanmotor.com](mailto:info@miksanmotor.com)