
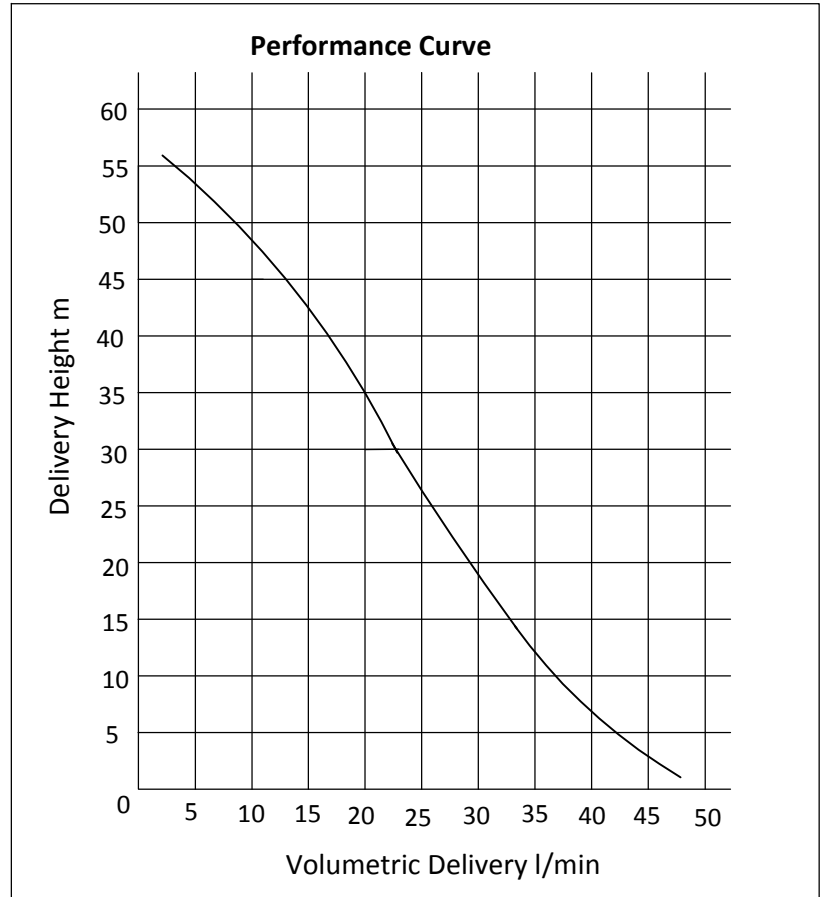


DIMENSIONS AND NOMINAL VALUES

TYPE	Volum. del. l/min	Depth of immer. h(mm)	Pipe conn. G	Weight kg	Power kw	Voltage V(ΔY)	Fre- quency Hz	Rated current A	Revo- lution rpm
FP 90 11	50	110	G 3/4	10.15	0.90	230/400	50	4.58/2.65	2825
FP 90 15		150		10.4					
FP 90 20		200		10.6					
FP 90 25		250		10.8					
FP 90 30		300		11.2					

Volumetric delivery * is measured at 2m water height. (± % 10)

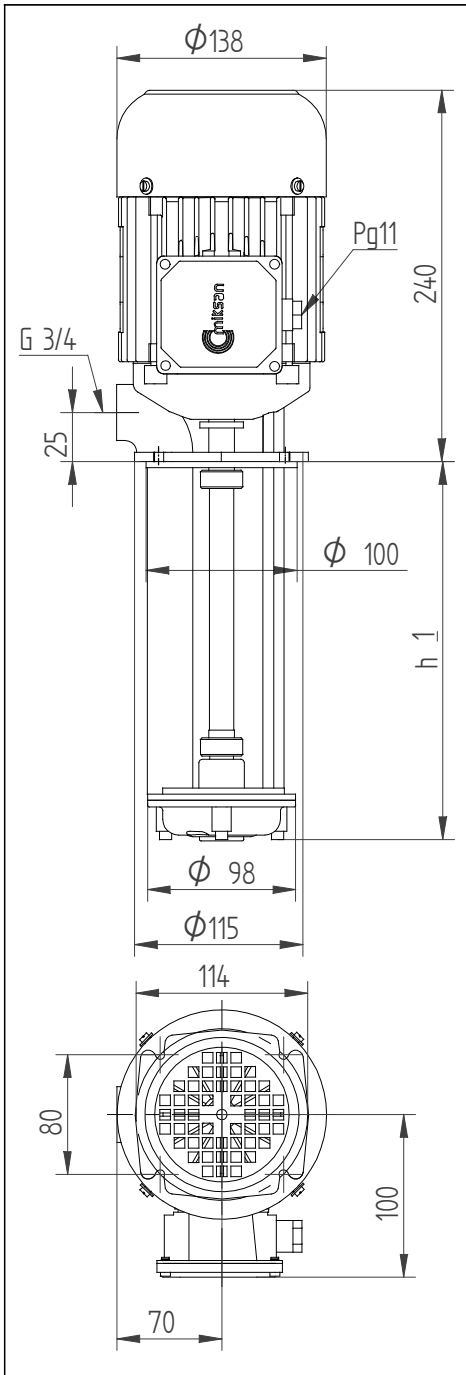

Kinematic viscosity: 90mm²/s

Operating Temperature Range : 0....60 °C

PROPERTIES:

- FP 90 Pump series are designed for circulation of cutting and chemical fluids.
- They serve as cooling and lubrication units on machine tools and automatic sews, etc.
- The shaft of the FP 90 Pump is made of engineering steel.
- The main body and pump intake cover of standart FP 90 Pump are cast iron.
- The impeller of the FP 90 Pump is made of brass.
- Standard FP 90 Pump has a three-phase motor. On demand, it can be equipped with a single-phase motor and other voltage, frequency.

THE DIMENSIONS OF THE PUMPS CONFORMS TO STANDARD EN 12157 SPECIFICATIONS.

Adress: BOSB, Bakır Piriñ Sanayicileri Sitesi

Menekşe Cad.No:1 - 34524 Beylikdüzü/İSTANBUL-TURKEY

Tel: 90 212 284 64 00

www.miksánmotor.com

Fax: 90 212 279 55 67

info@miksánmotor.com