

MIKSAN 100 4A EX SERIES EX-PROOF



3-Phase, 400V $\pm$ %10, 50 Hz

Duty Type : S1

Degree of protection : IP65

Insulation Class : F (155°C)

Mounting : B14

ELECTRICAL DESIGN

Rated power(W) : 2200

Speed(rpm) : 1430

Rated current(A) : 4,90

Torque –Mn(Nm) : 14,60

Cos ϕ : 0,76

Efficiency (%) : 84,3

LOCKED ROTOR TORQUE

Locked rotor Current– Ia(A) : 27,44

Ia / In : 5,6

Locked rotor Torque- Ma(Nm) : 36,66

Ma / Mn : 2,1

MECHANICAL DESIGN

Frame : Aluminum

End Shields : Aluminum

Terminal Box : Aluminum

Cable gland : M20x1,5 EX

BEARING ARRANGEMENT

Drive End


6206 ZZ C3

Non Drive End



6206 ZZ C3

Paint : None

Weight : 22,4 kg



B3-B6-B7-B8-V5-V6

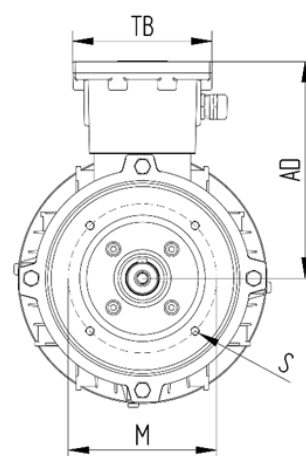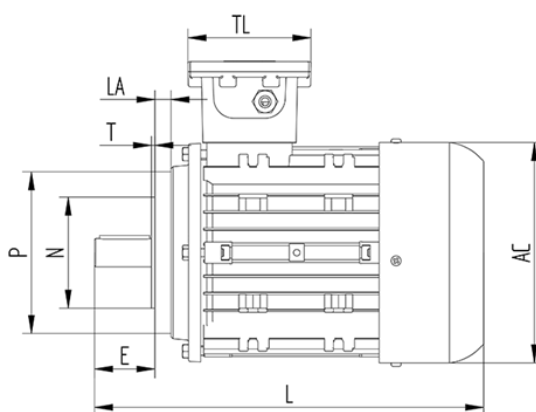

L	P	N	M	T	øAC	LA	S	AD	TB/TL	E	øD	øDB	GA	FxGD
375	160	110	130	3.5	194	16.0	M8	174	122	60	28	M10	31	8x8

IEP 16 ATEX 0433X

II 2G Ex db IIC T4 Gb

II 2D Ex tb IIIC T120°C Db,IP65