

MIKSAN 63 4A EX SERIES EX-PROOF



3-Phase 230Δ/400Y V 50Hz

Duty Type	: S1
Degree of protection	: IP65
Insulation Class	: F (155°C)
Mounting	: B3

ELECTRICAL DESIGN

Rated power(W)	: 120
Speed(rpm)	: 1380
Rated current(A)	: 0,65
Torque –Mn(Nm)	: 0,85
Cos φ	: 0,60
Efficiency (%)	: 59,1

LOCKED ROTOR TORQUE

Locked rotor Current– Ia(A)	: 2,02
Ia / In	: 3,1
Locked rotor Torque- Ma(Nm)	: 1,87
Ma / Mn	: 2,2

MECHANICAL DESIGN

Frame	: Aluminum
End Shields	: Aluminum
Terminal Box	: Aluminum
Cable gland	: M20x1,5 EX

BEARING ARRANGEMENT

Drive End

6202 ZZ C3

Non Drive End


6202 ZZ C3

Paint



: None

Weight

: 4,7 kg



B3-B6-B7-B8-V5-V6

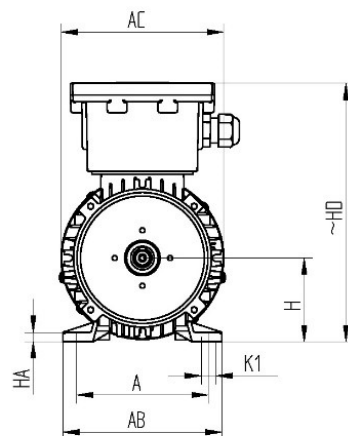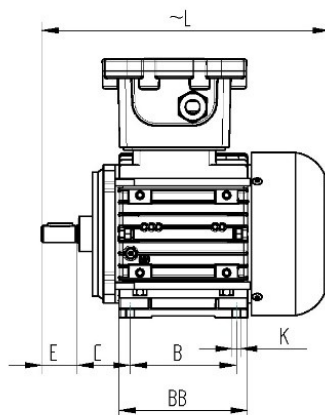

L	H	HD~	A	AB	øAC	B	BB	K	K1	C	E	øD	øDB	GA	FxGD
210	63	204	100	120	124	80	100	7	10	40	23	11	M4	12.5	4x4

IEP 16 ATEX 0433X

II 2G Ex db IIC T4 Gb

II 2D Ex tb IIIC T120°C Db,IP65