

MIKSAN 80 4A EX SERIES EX-PROOF



3-Phase 400V 50Hz

Duty Type	: S1
Degree of protection	: IP65
Insulation Class	: F (155°C)
Mounting	: B5

ELECTRICAL DESIGN

Rated power(W)	: 550
Speed(rpm)	: 1410
Rated current(A)	: 1,50
Torque –Mn(Nm)	: 3,80
Cos ϕ	: 0,73
Efficiency (%)	: 77,1

LOCKED ROTOR TORQUE

Locked rotor Current– Ia(A)	: 5,55
Ia / In	: 3,7
Locked rotor Torque- Ma(Nm)	: 7,60
Ma / Mn	: 2,0



MECHANICAL DESIGN

Frame	: Aluminum
End Shields	: Aluminum
Terminal Box	: Aluminum
Cable gland	: M20x1,5 EX



BEARING ARRANGEMENT

Drive End
6204 ZZ C3
Non Drive End
6204 ZZ C3

Paint	: None
Weight	: 9,9 kg

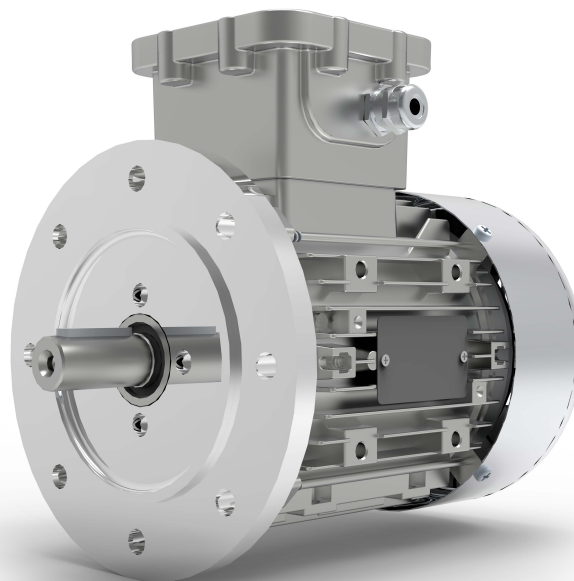

B3-B6-B7-B8-V5-V6

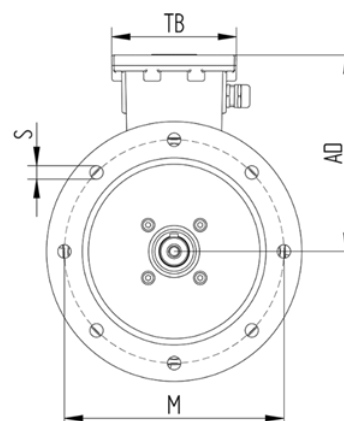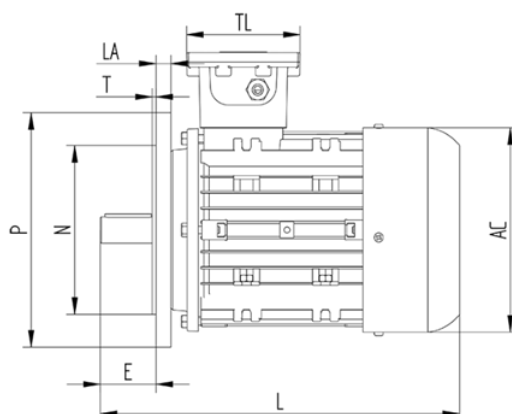

L	P	N	M	T	øAC	LA	S	AD	TB/TL	E	øD	øDB	GA	FxGD
НТО	НЛЛ	МОЛ	МСР	ОФР	МРТ	1Н.0	1Н	МРС	122	ПЛ	МФ	МС	НМФР	СЁС

IEP 16 ATEX 0433X

II 2G Ex db IIC T4 Gb

II 2D Ex tb IIIC T120°C Db,IP65