



FPB 90 PUMP

Applications:


- Cutting, turning, milling, boring, grinding and similar applications of the machine tools,
- Cooling systems,
- Circulation systems. FP90 Pumps are used for pumping of cutting / cooling fluids.
- Pump has a peripheral impeller so it is recommended to use filtered fluid applications.

Fluid Specifications:

- Coolants,
- Cutting oils,
- Fluid temperature 0...80 °C
- Kinematic viscosity 1...90 mm²/s

Materials:

Pump body	: Brass
Volute	: Brass
Impeller	: Brass
Pump shaft	: Stainless steel - AISI 420(DIN X20Cr13)
Electric motor	: 3 phase induction motor - 2 pole, Protection degree IP 55

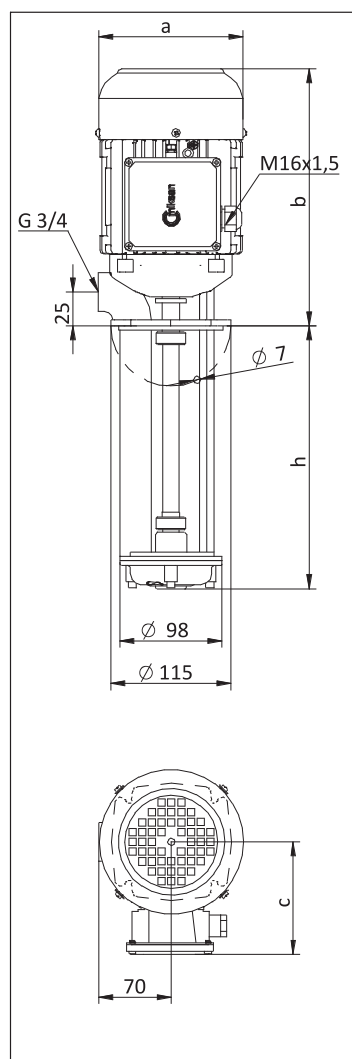

DIMENSIONS & NOMINAL VALUES

TYPE	Depth of immersion h (mm)				Weight	Power	Voltage	Frequency	Rated current	Speed
		a	b	c	kg	kW	V(Δ/Y)	Hz	A	rpm
		mm								
FPB 90/15	150	138	240	111	11,4	1.1	230/400	50	4.85/2.8	2720
FPB 90/20	200				11.7					

* Pump dimensions according to EN 12157.

** The performance curves are based on 1 mm²/s (cSt) kinematic viscosity values and 997 kg/m³ density

*** Curve tolerance according to ISO 9906:2012 Grade 3B.

**** FP 90 pump has IE2 motor. According to IEC 60034-30-1:2014 standard this pump is excluded from efficiency class since its motor is completely integrated into the pump.

Performance Curve

