



HCA PUMP

Applications:

- Cutting, turning, milling, boring, grinding and similar applications of the machine tools,
- Erosion machines,
- Circulation systems. HC Pumps are used for pumping of cutting / cooling fluids.


Fluid Specifications:

- Coolants,
- Cutting oils,
- Grinding oils,
- Water,
- Fluid temperature 0...80 °C
- Kinematic viscosity 1...30 mm²/s

Materials:

Pump body	: Cast iron - DIN GG 25
Bottom plate	: Sheet iron
Diffuser	: Stainless steel - DIN 4301 (AISI 304)
Impeller	: Stainless steel - DIN 4301 (AISI 304)
Stage cover	: Stainless steel - DIN 4301 (AISI 304)
Pump shaft	: Stainless steel - DIN 4401 (AISI 316)
O-ring	: Viton
Mechanical seal	: C - SiC - Viton TC - TC - Viton (Optional)
Electric motor	: 3 phase induction motor - 2 pole, Protection degree IP 55

DIMENSIONS & NOMINAL VALUES

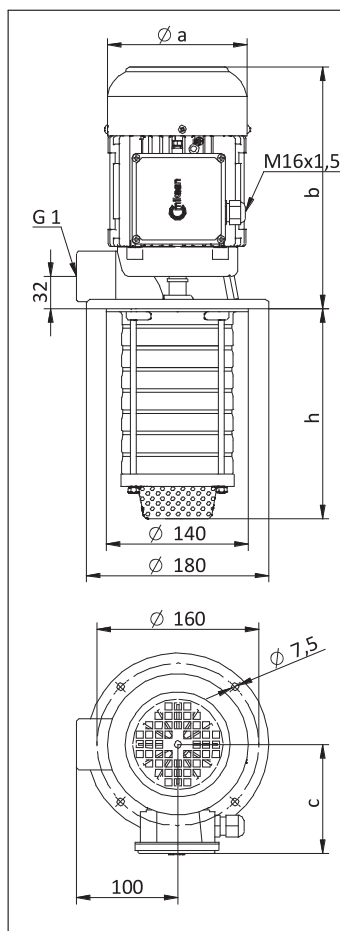

	Depth of immersion	a	b	c	Weight	Power	Voltage	Frequency	Rated current	Speed
TYPE	h (mm)	mm			kg	kW	V(ΔΥ)	Hz	A	rpm
HCA 02	143	138	240	111	10.1	0.37	230/400	50	1.84/1.05	2790
HCA 03	143				11.4	0.55			2.25/1.3	2780
HCA 04	164				13.3	0.75			3.12/1.8	2820
HCA 05	185				13.6	0.90			4.85/2.1	2800
HCA 06	206				13.8	0.90			4.85/2.1	2800
HCA 07	227				14.0	1.10			4.85/2.8	2720

* The performance curves are based on 1 mm²/s (cSt) kinematic viscosity values and 997 kg/m³ density

** Curve tolerance according to ISO 9906:2012 Grade 3B.

*** HCA/07 pumps have IE2 motors. According to IEC 60034-30-1:2014 standard these pumps are excluded from efficiency class since their motors are completely integrated into the pump.

Performance Curve

