



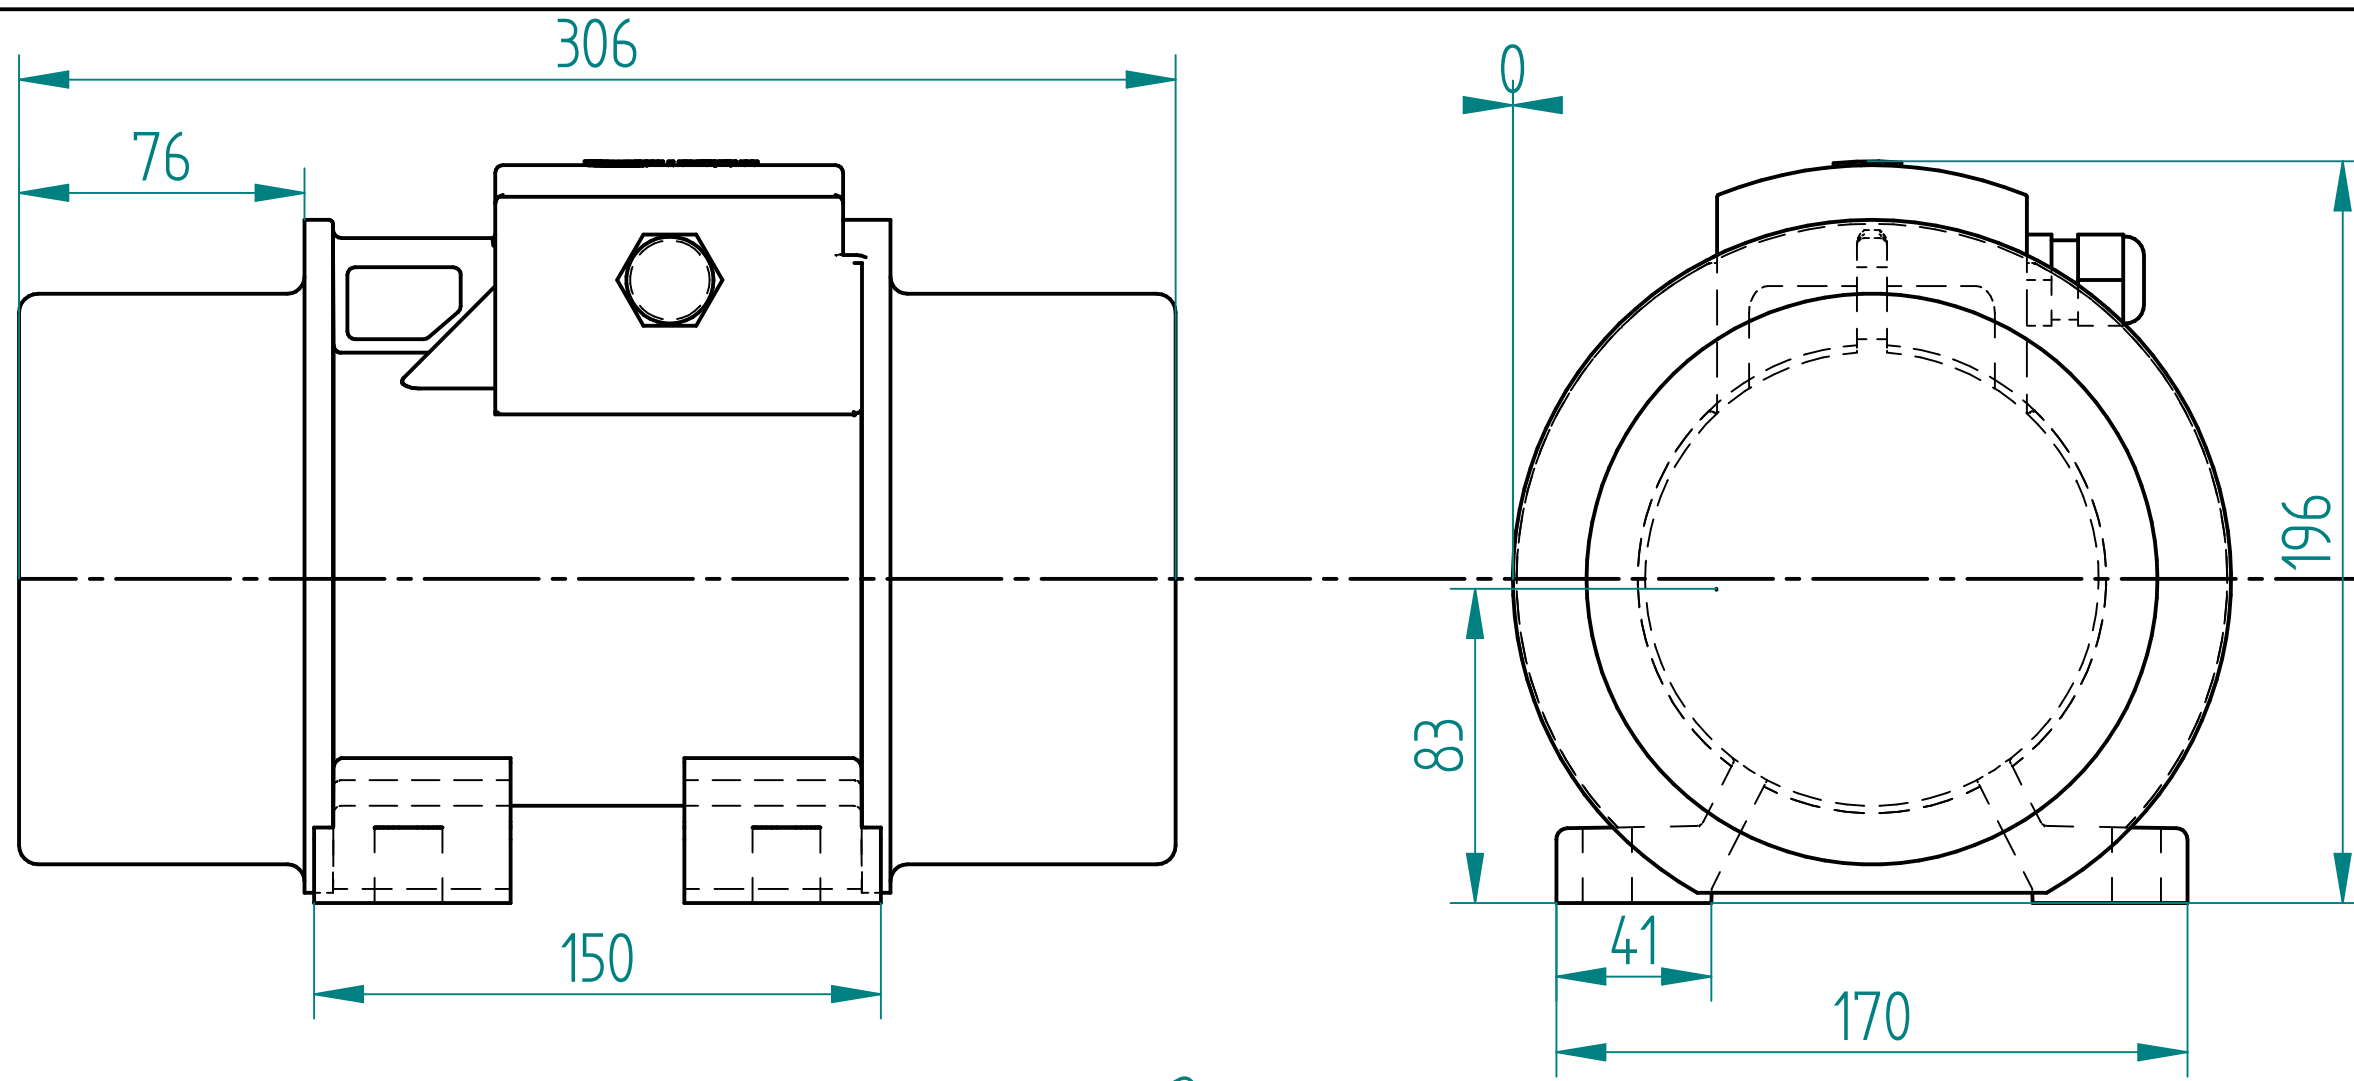

4x Ø 13

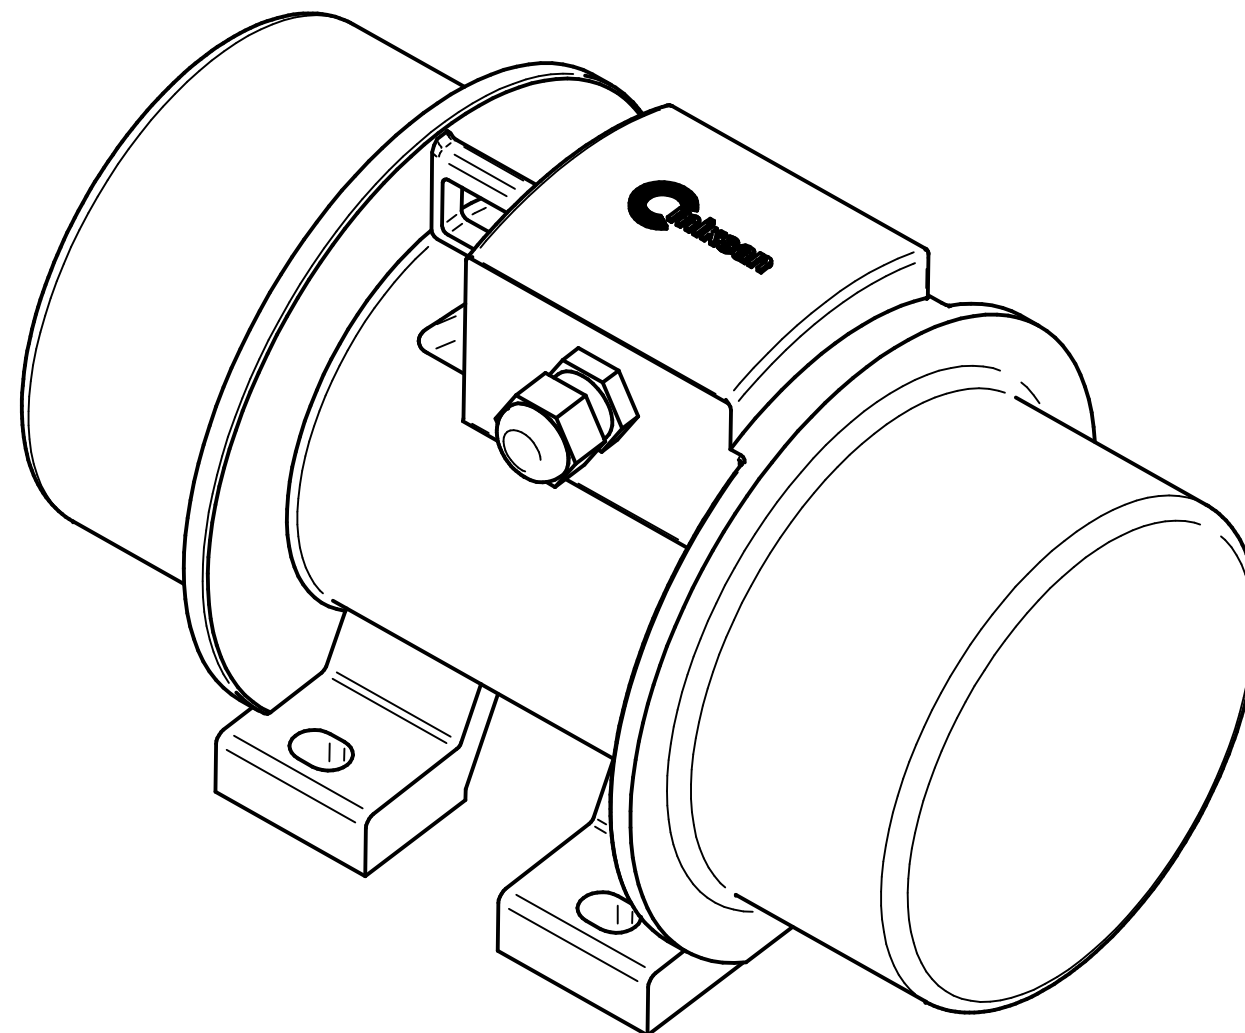

	VC 6-180	
Statik moment	Static moment	161 kgmm
Santrifüj Kuvveti	Centrifugal Force	180 kg-1766 N
Frekans	Frequency	50 Hz
Ağırlık	Weight	17,7 kg
Devir	RPM	1000(50Hz)
Nominal gerilim	Nominal voltage	230/400 V
Maksimum akım	Max. Current	1,12/0,65 A
Maks. Giriş Gücü	Max.Input Power	0,3 kW
Faz	Phase	3
Mak. Ortam sıcaklığı	Max.Amb.	40 C
Koruma Sınıfı	Safety Class	IP 66
cosφ	cosφ	0,67
Rulman Tipi	Bearing Type	6305-ZZ-G100-C3
Rulman Ömrü	Life Bearing	>100000 saat (hours)

BOSB Bakır ve Pirinç Sanayicileri Sitesi
 Menekşe Cad.No:1
 Beylikdüzü / İstanbul
 Tel :(+90) 212 284 6400
 Fax :(+90) 212 279 5567
 E-mail:info@miksanmotor.com
 Web :www.miksanmotor.com

