

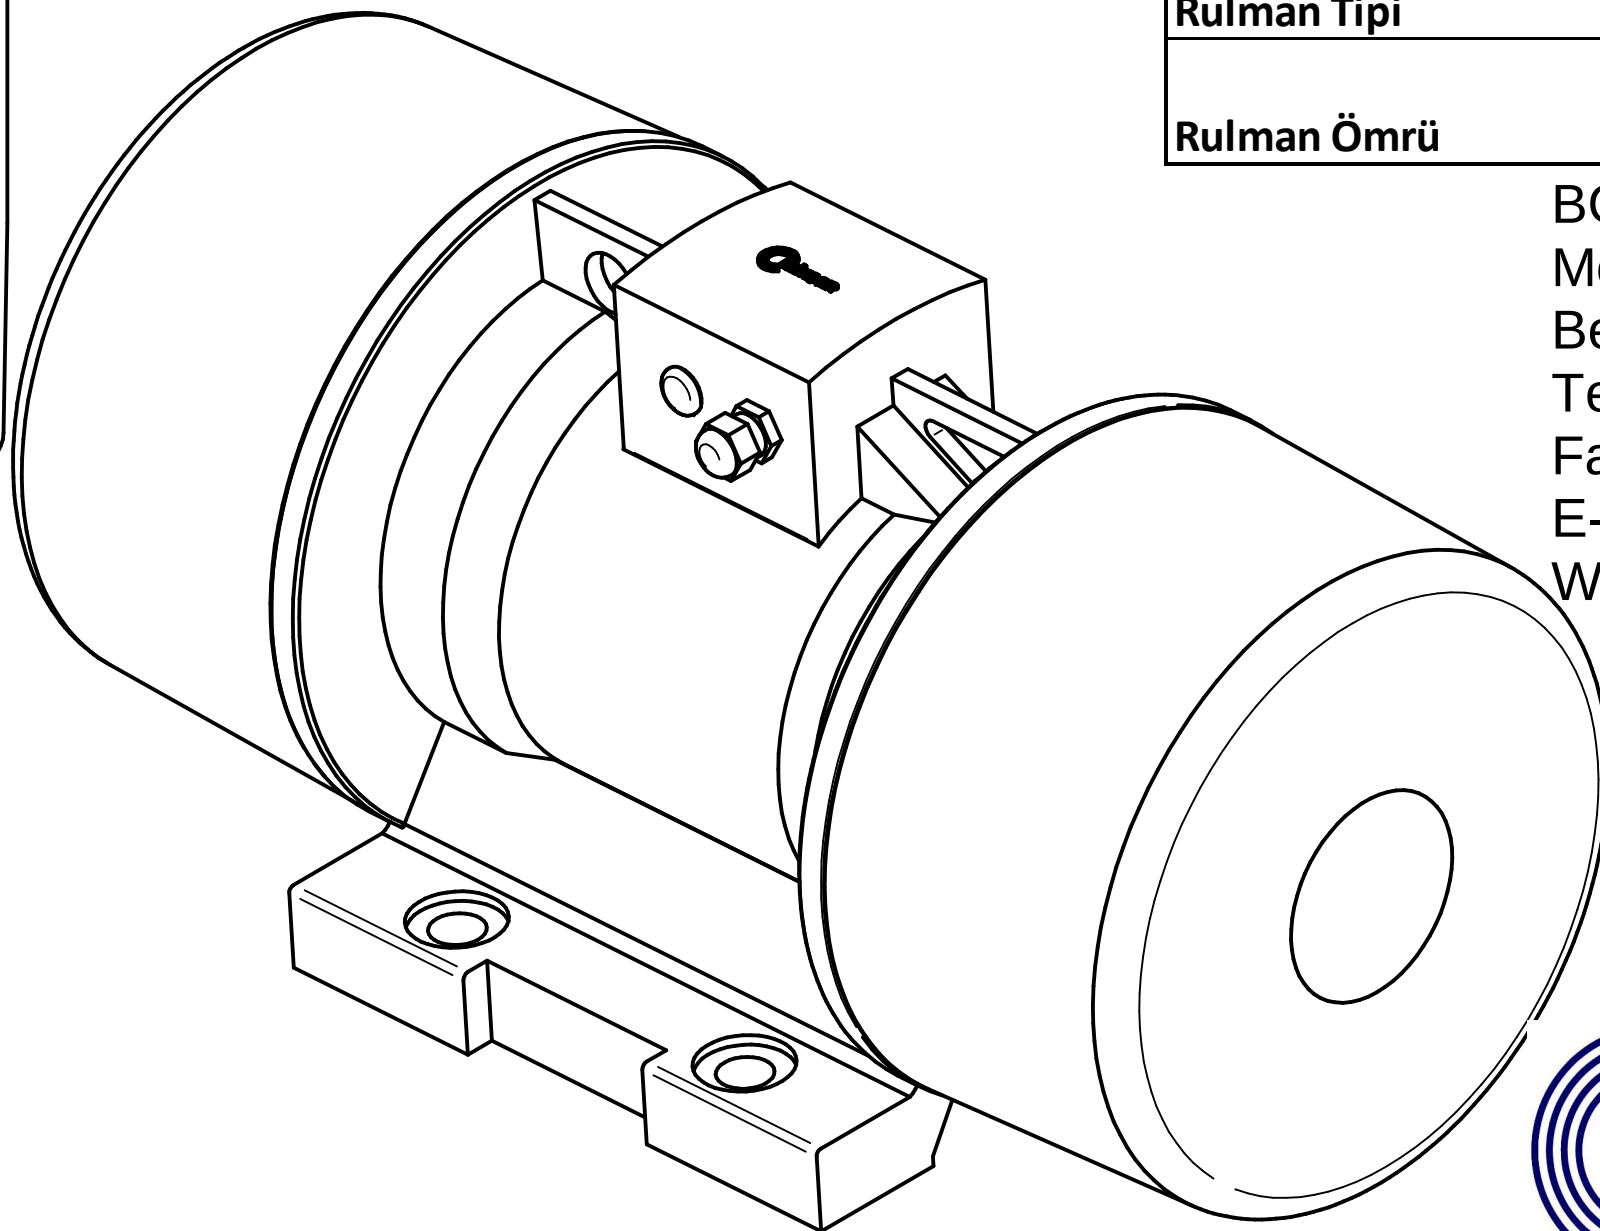
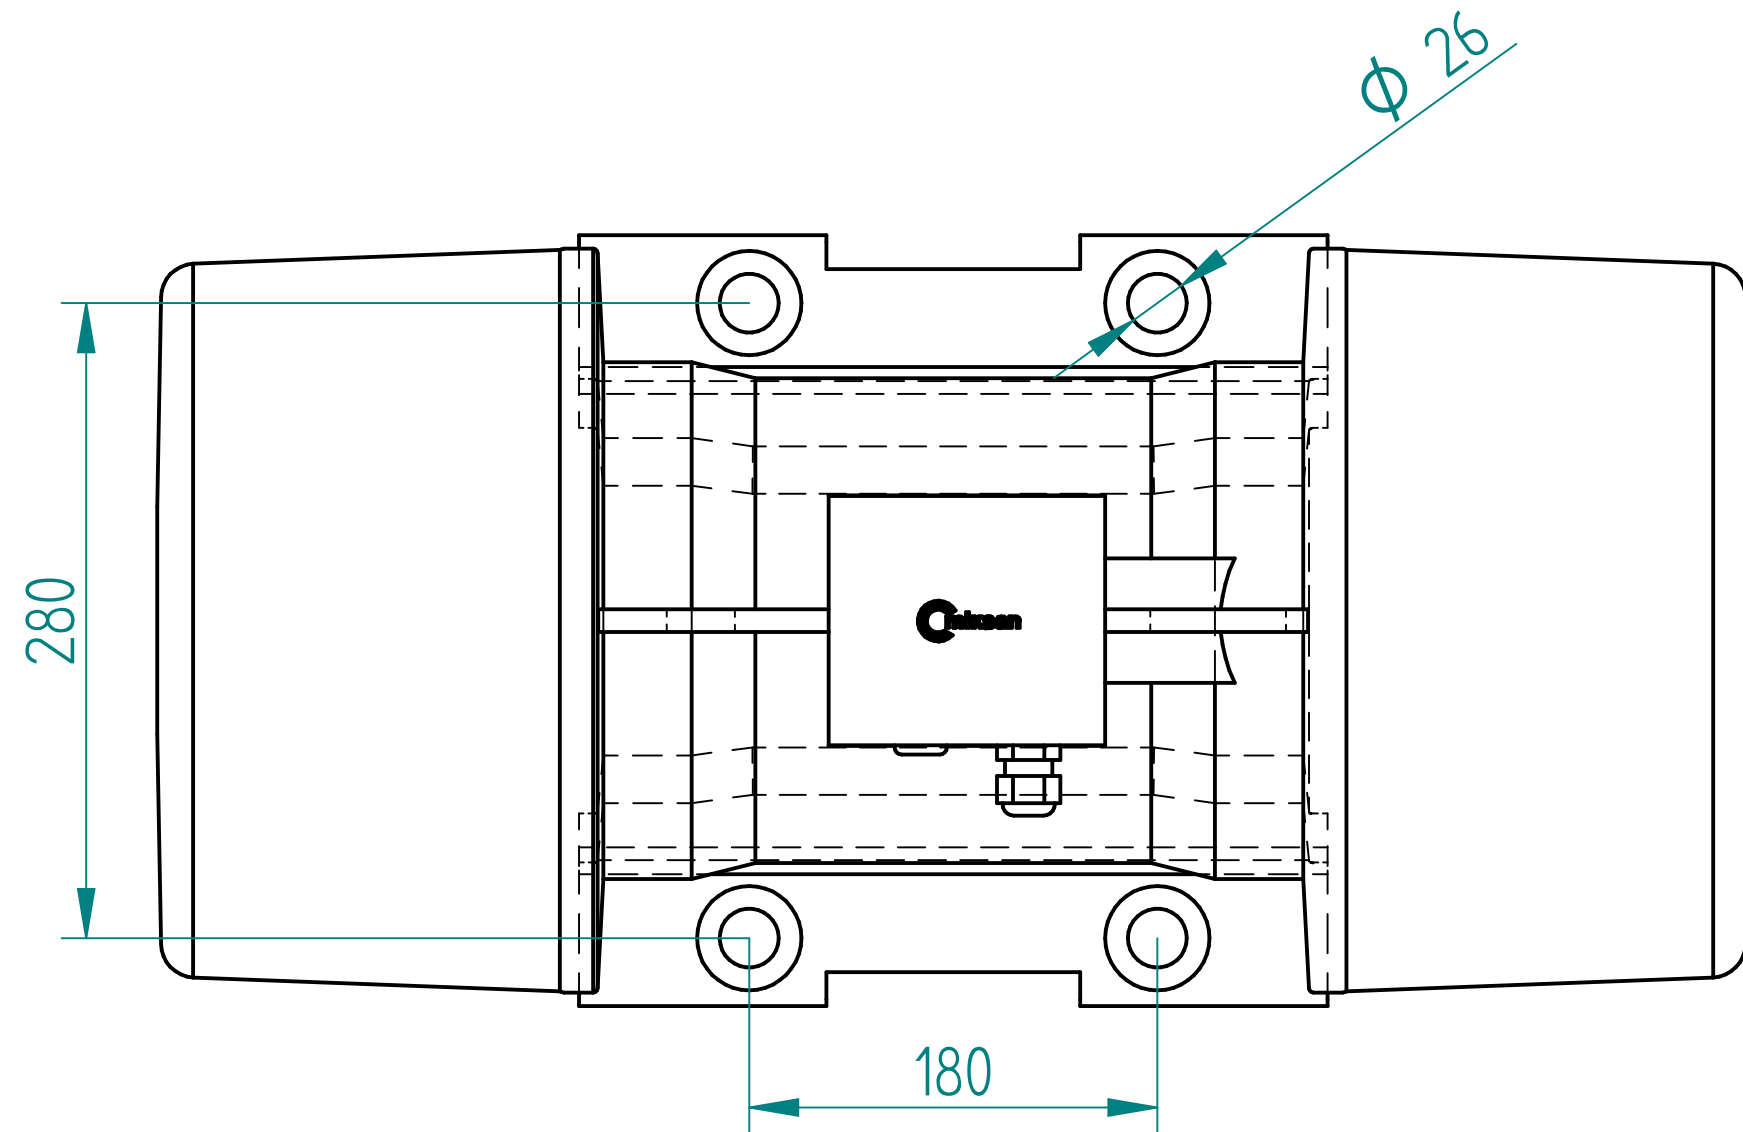


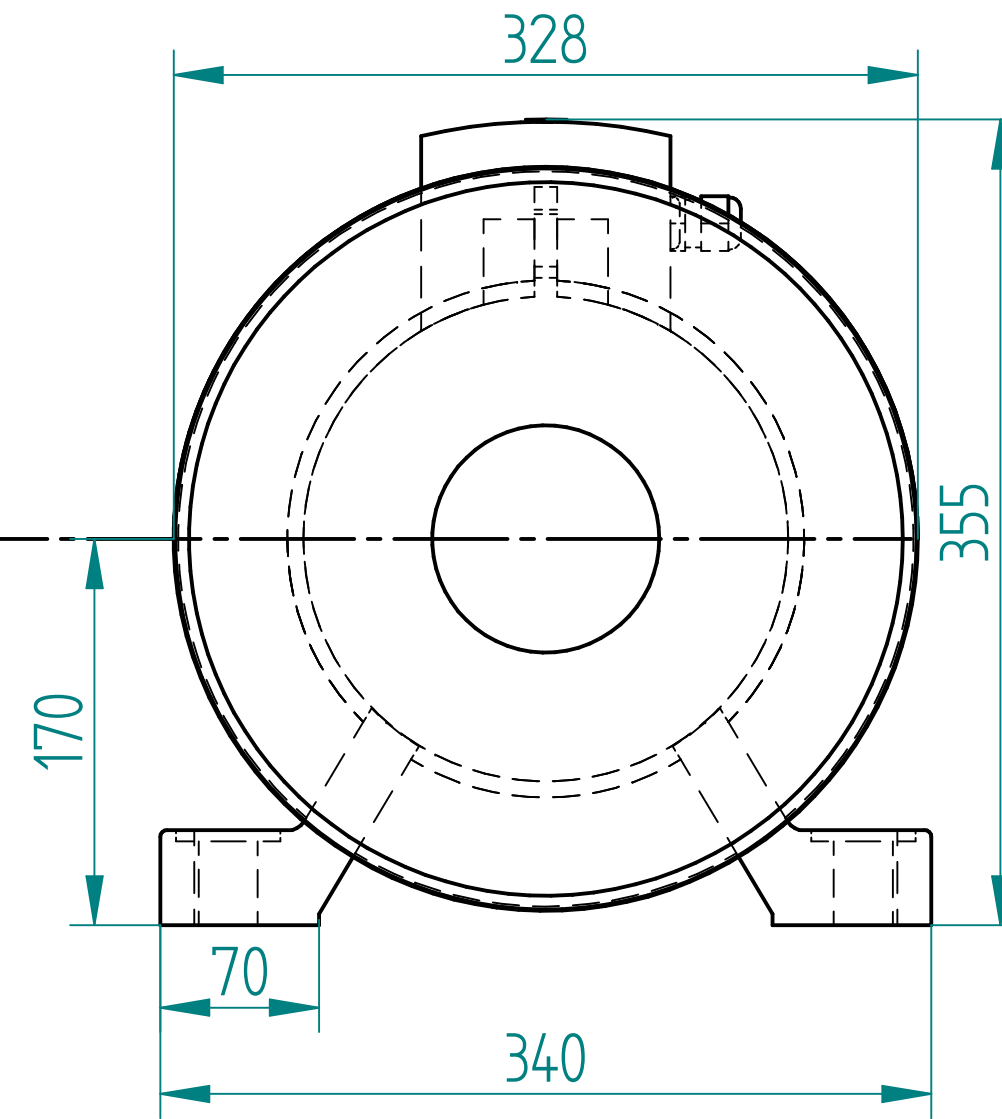

	VK 6-3800	
Statik moment	Static moment	3399 kgmm
Santrifüj Kuvveti	Centrifugal Force	3800 kg-37278 N
Frekans	Frequency	50 Hz
Ağırlık	Weight	174,0 kg
Devir	RPM	1000(50Hz)
Nominal gerilim	Nominal voltage	230/400 V
Maksimum akım	Max. Current	12,30/7,10 A
Maks. Giriş Gücü	Max.Input Power	3,2 kW
Faz	Phase	3
Mak. Ortam sıcaklığı	Max.Amb.	40 C
Koruma Sınıfı	Safety Class	IP 66
cosφ	cosφ	0,66
Rulman Tipi	Bearing Type	NJ 2313-E-TVP2-C4
Rulman Ömrü	Life Bearing	14000 saat (hours)

BOSB Bakır ve Pirinç Sanayicileri Sitesi
Menekşe Cad.No:1
Beylikdüzü / İstanbul
Tel :(+90) 212 284 6400
Fax :(+90) 212 279 5567
E-mail:info@miksanmotor.com
Web :www.miksanmotor.com

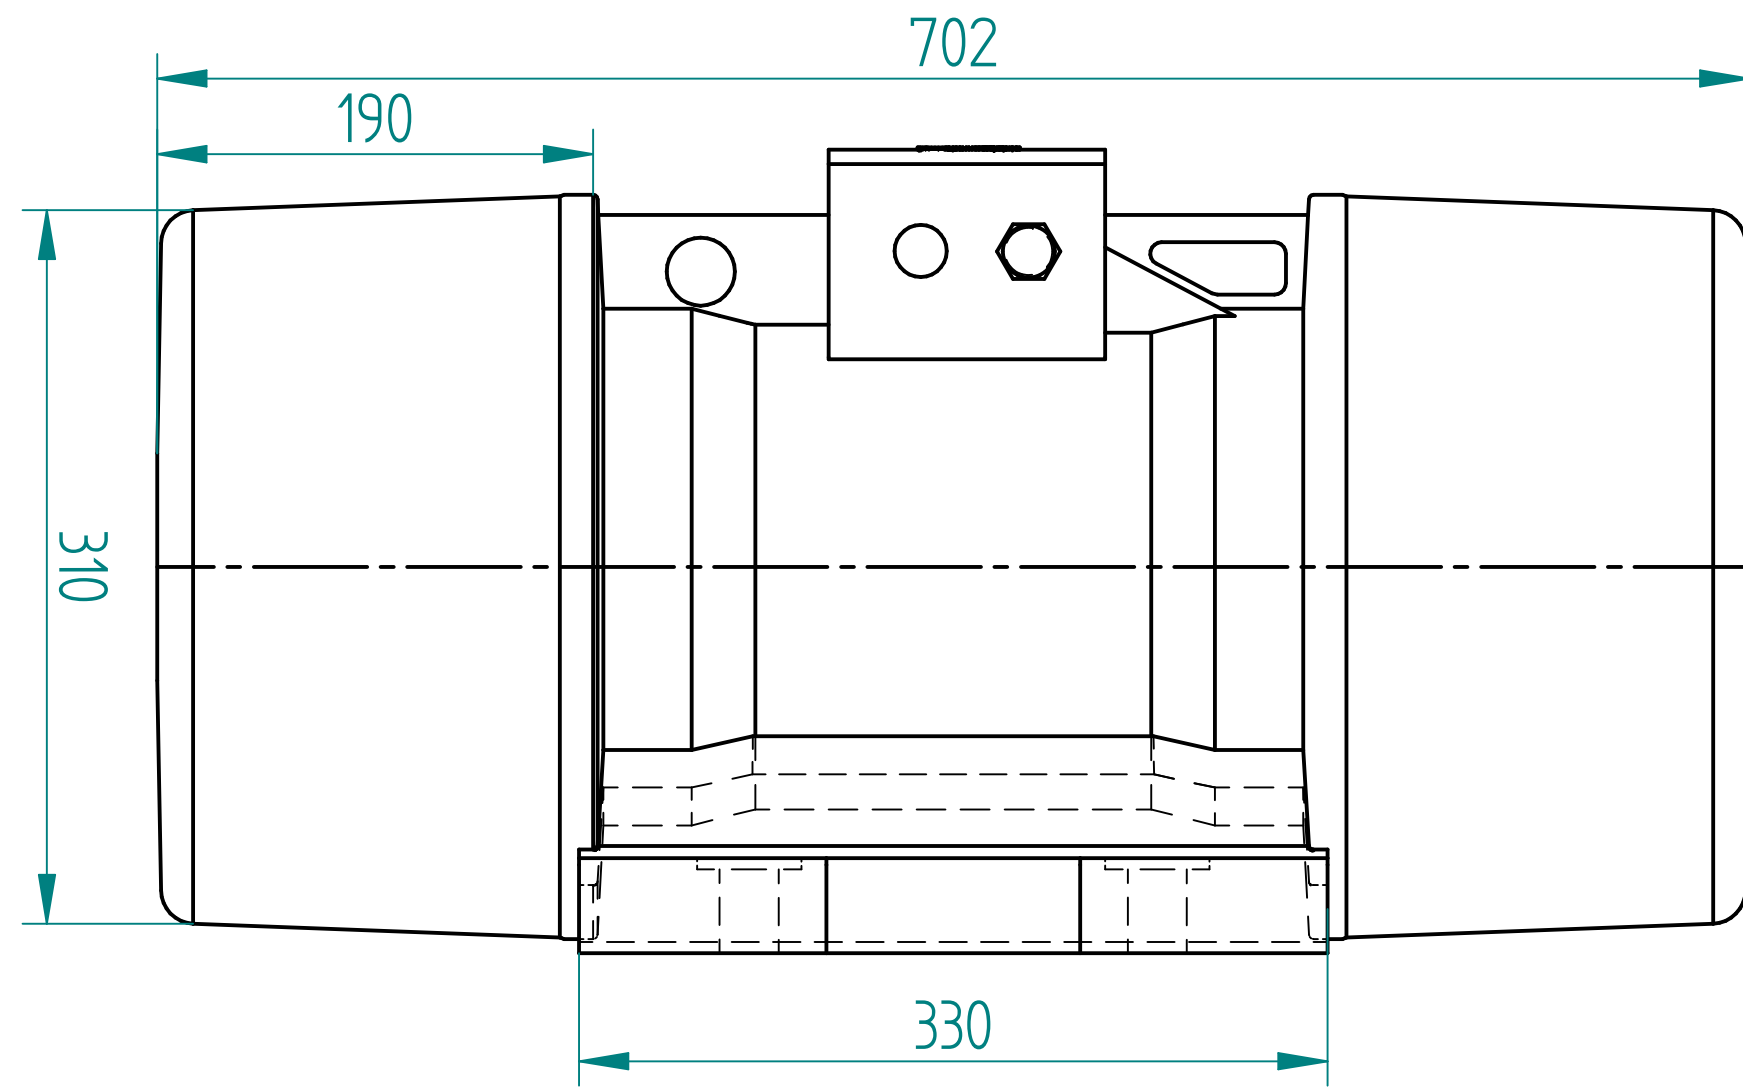