

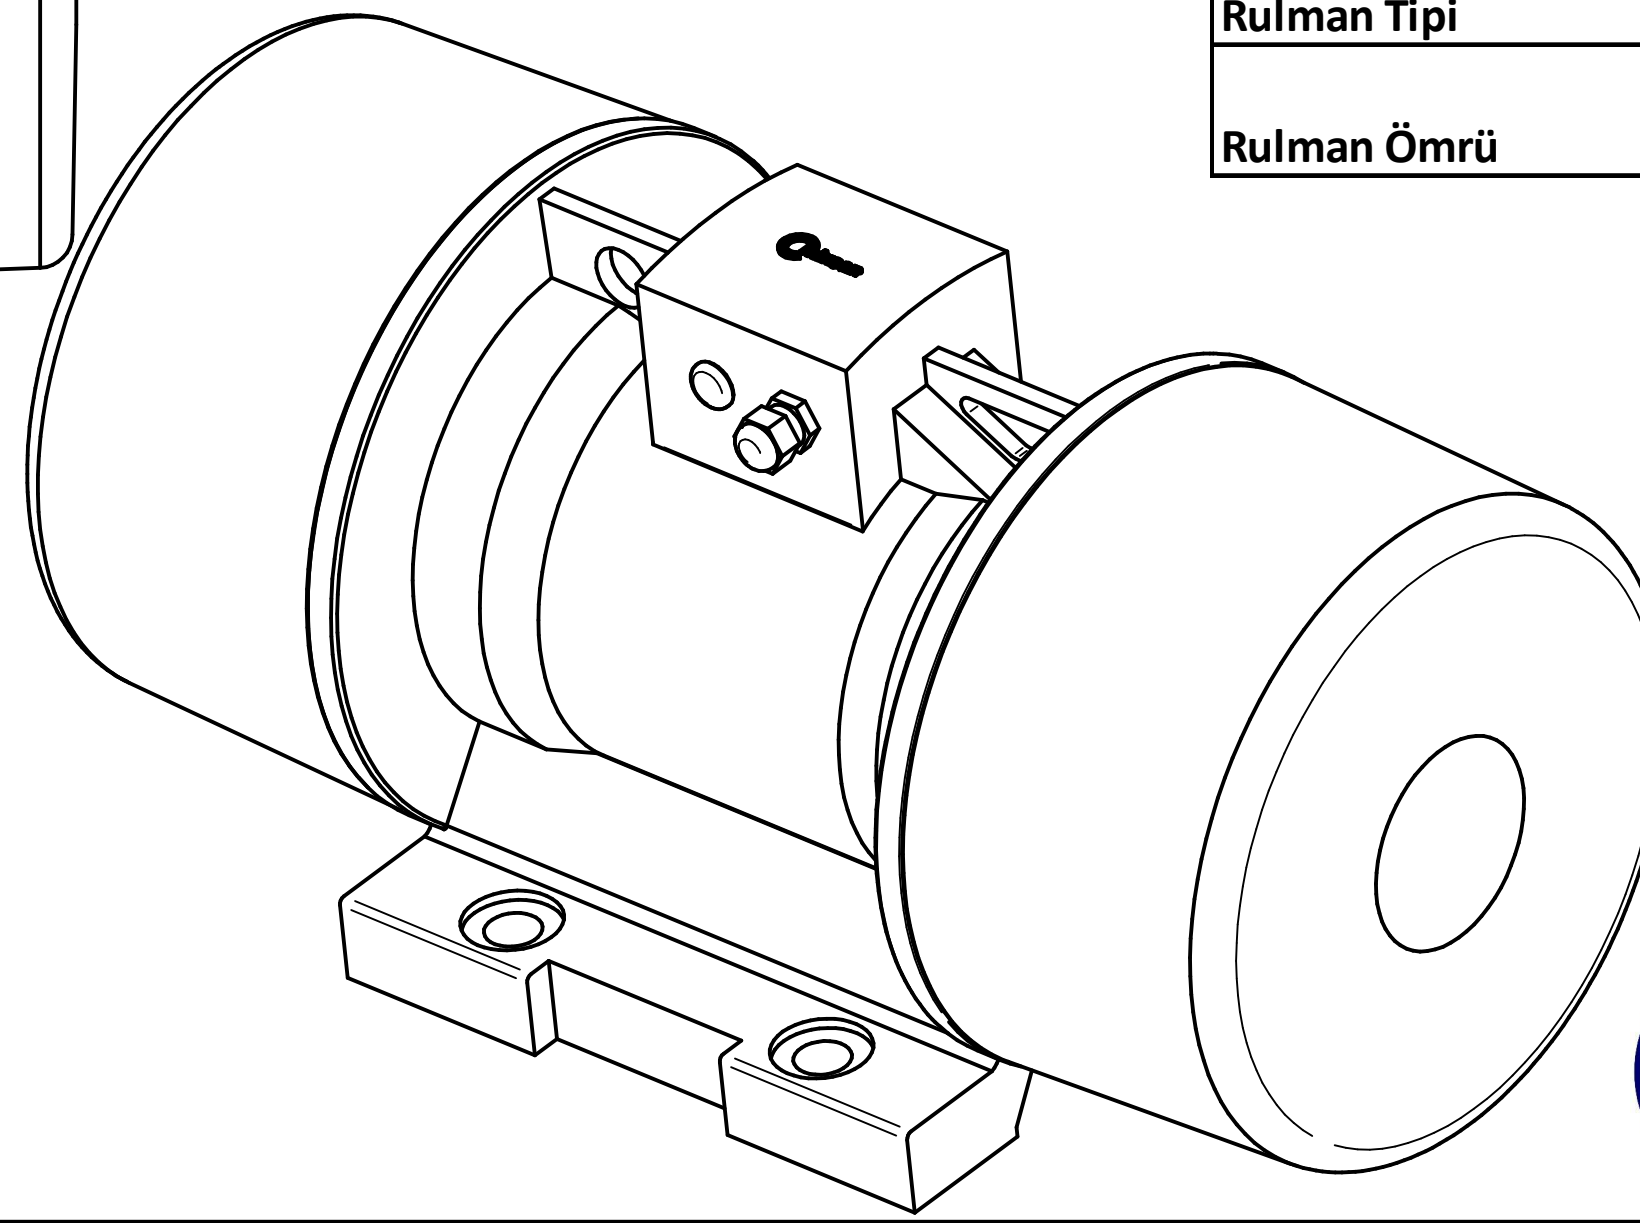


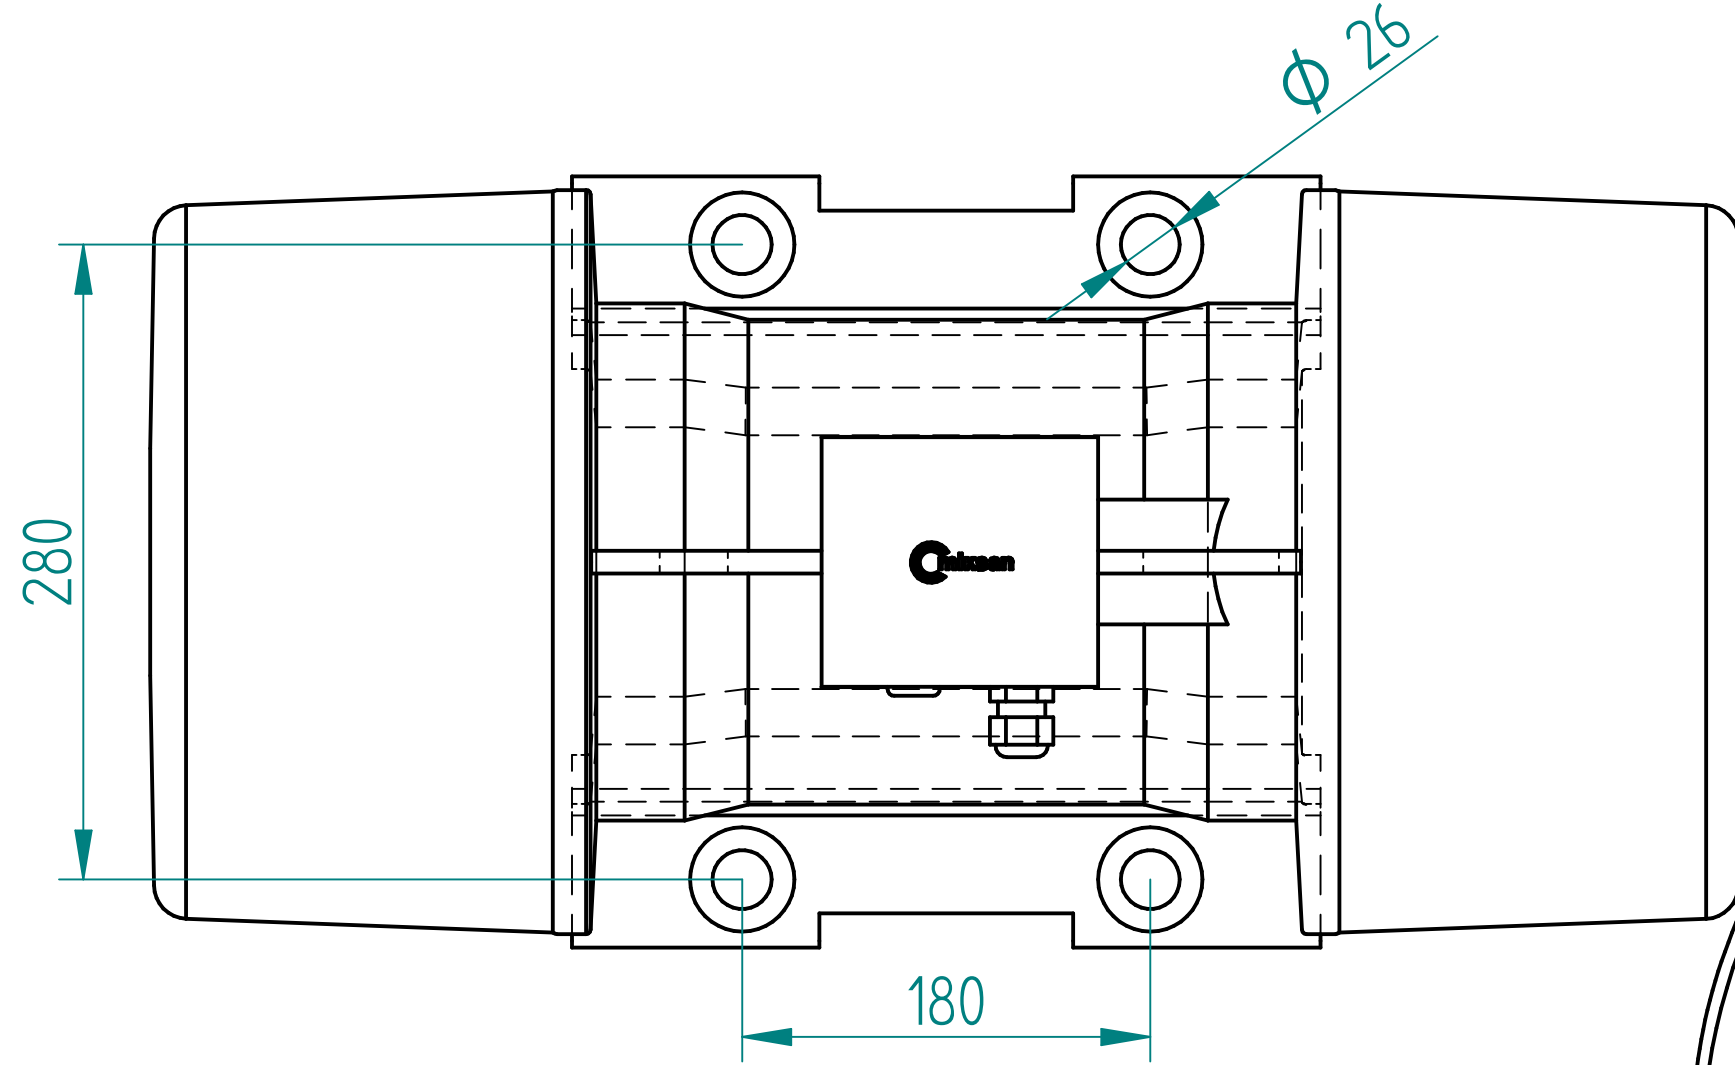

|                      |                   |                      |
|----------------------|-------------------|----------------------|
|                      | <b>VK 8-2650</b>  |                      |
| Statik moment        | Static moment     | 4214 kgmm            |
| Santrifüj Kuvveti    | Centrifugal Force | 2650 kg-25997 N      |
| Frekans              | Frequency         | 50 Hz                |
| Ağırlık              | Weight            | 184,0 kg             |
| Devir                | RPM               | 750(50Hz)            |
| Nominal gerilim      | Nominal voltage   | 230/400 V            |
| Maksimum akım        | Max. Current      | 12,30/7,10 A         |
| Maks. Giriş Gücü     | Max.Input Power   | 2,5 kW               |
| Faz                  | Phase             | 3                    |
| Mak. Ortam sıcaklığı | Max.Amb.          | 40 C                 |
| Koruma Sınıfı        | Safety Class      | IP 66                |
| cosφ                 | cosφ              | 0,52                 |
| Rulman Tipi          | Bearing Type      | NJ 2313-E-TVP2-C4    |
| Rulman Ömrü          | Life Bearing      | >100000 saat (hours) |

BOSB Bakır ve Pirinç Sanayicileri Sitesi  
Menekşe Cad.No:1  
Beylikdüzü / İstanbul  
Tel :(+90) 212 284 6400  
Fax :(+90) 212 279 5567  
E-mail:[info@miksanmotor.com](mailto:info@miksanmotor.com)  
Web :[www.miksanmotor.com](http://www.miksanmotor.com)

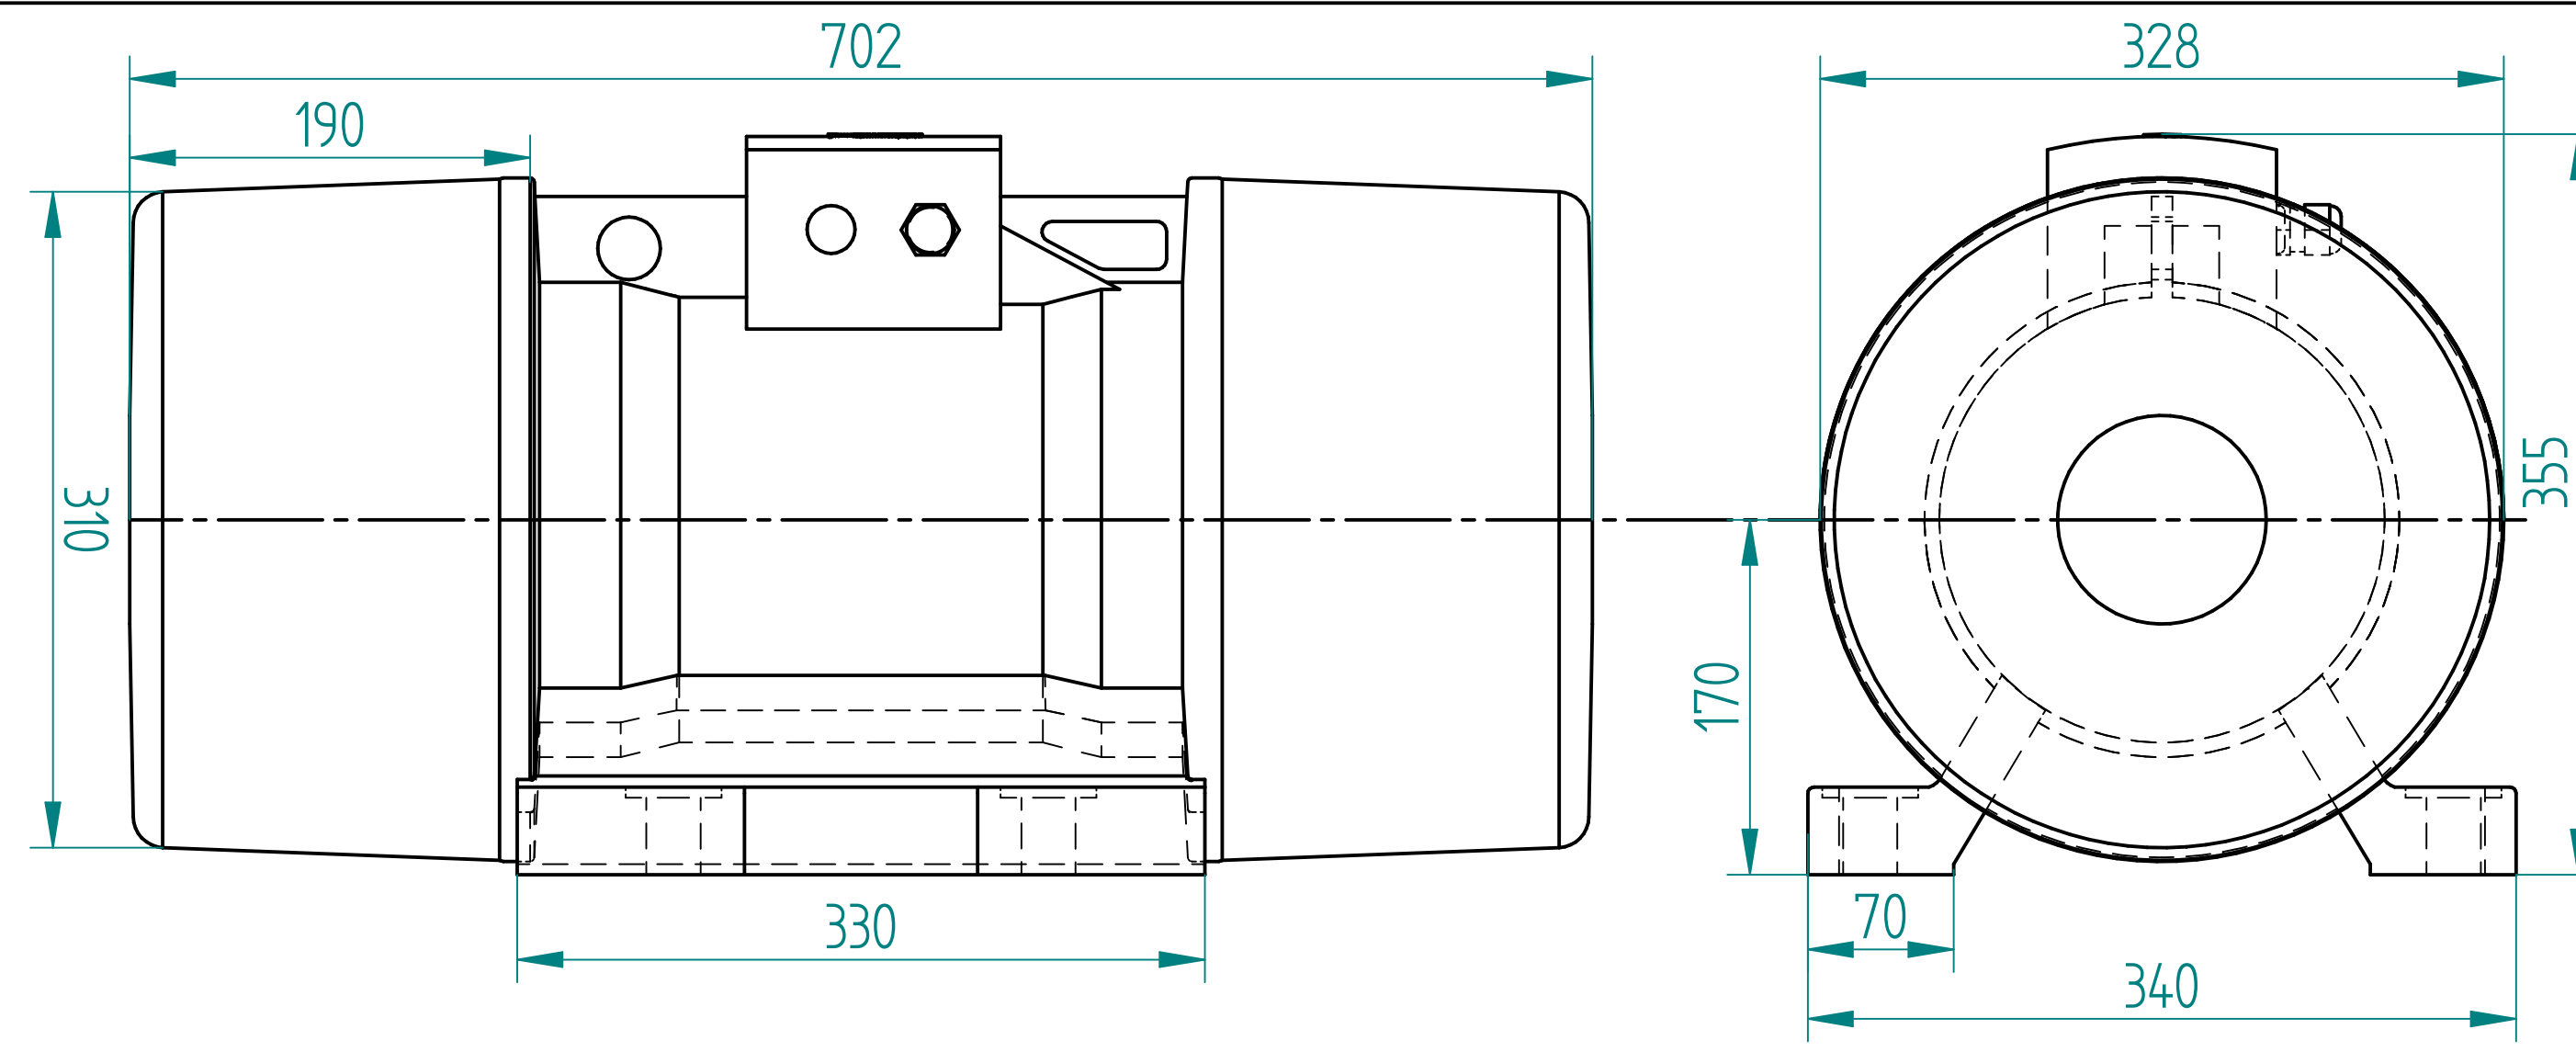