

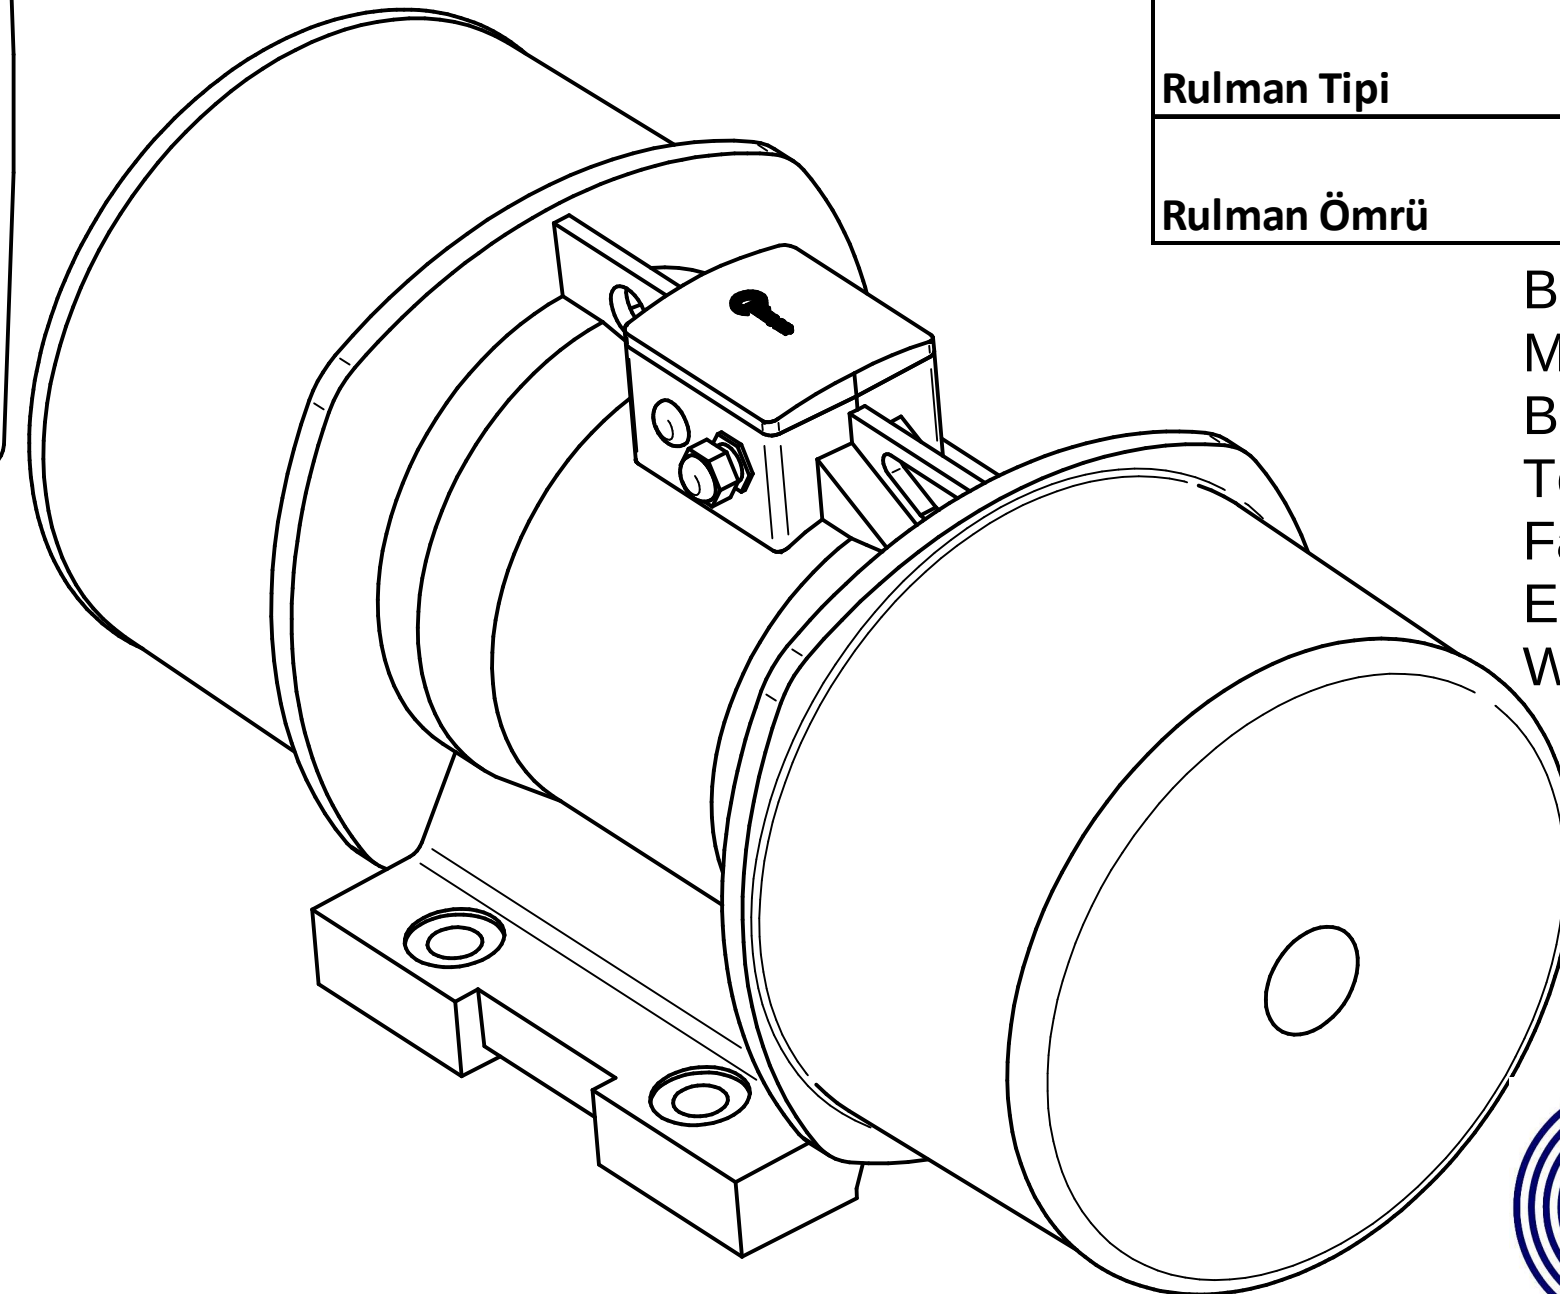


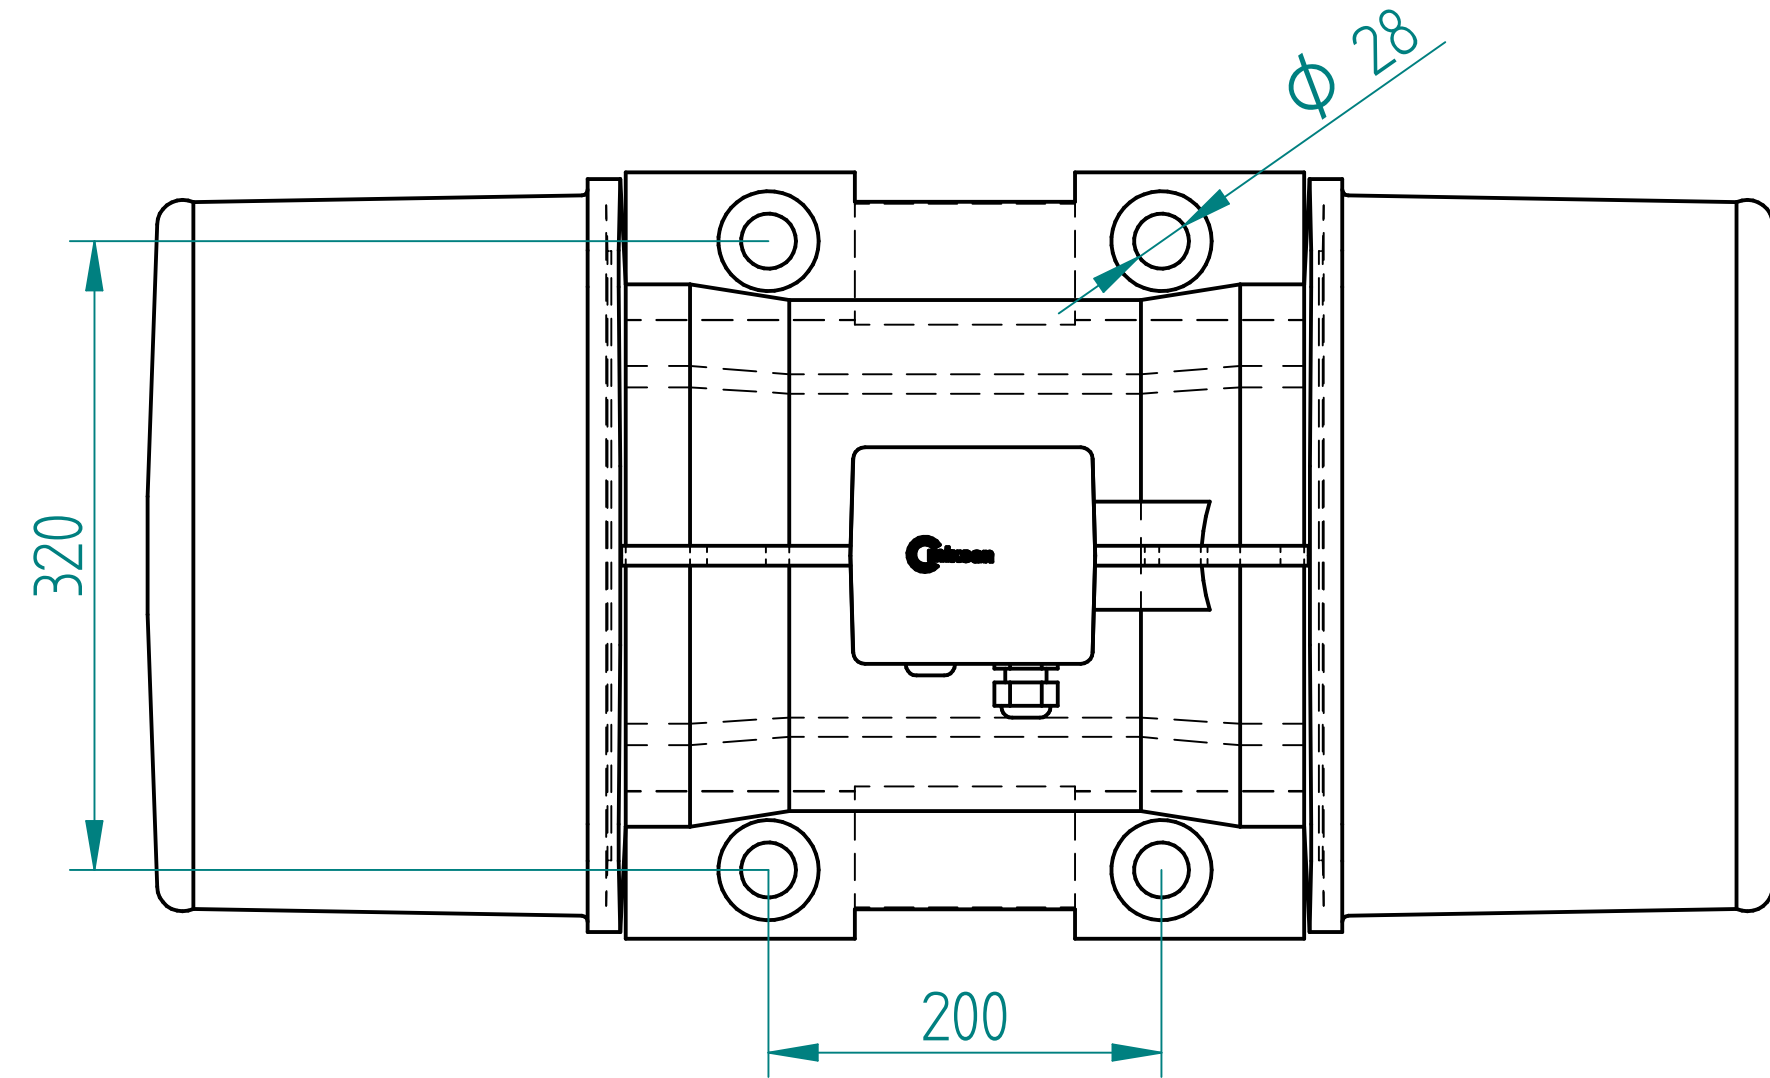

|                      |                   |                    |
|----------------------|-------------------|--------------------|
|                      | <b>VL 6-8000</b>  |                    |
| Statik moment        | Static moment     | 7313 kgmm          |
| Santrifüj Kuvveti    | Centrifugal Force | 8175 kg-80197 N    |
| Frekans              | Frequency         | 50 Hz              |
| Ağırlık              | Weight            | 277,0 kg           |
| Devir                | RPM               | 1000(50Hz)         |
| Nominal gerilim      | Nominal voltage   | 230/400 V          |
| Maksimum akım        | Max. Current      | 23,55/13,60 A      |
| Maks. Giriş Gücü     | Max.Input Power   | 7,5 kW             |
| Faz                  | Phase             | 3                  |
| Mak. Ortam sıcaklığı | Max.Amb.          | 40 C               |
| Koruma Sınıfı        | Safety Class      | IP 66              |
| cosφ                 | cosφ              | 0,65               |
| Rulman Tipi          | Bearing Type      | NJ 2315-E-TVP2-C4  |
| Rulman Ömrü          | Life Bearing      | 15000 saat (hours) |

BOSB Bakır ve Pirinç Sanayicileri Sitesi  
Menekşe Cad.No:1  
Beylikdüzü / İstanbul  
Tel :(+90) 212 284 6400  
Fax :(+90) 212 279 5567  
E-mail:[info@miksanmotor.com](mailto:info@miksanmotor.com)  
Web :[www.miksanmotor.com](http://www.miksanmotor.com)

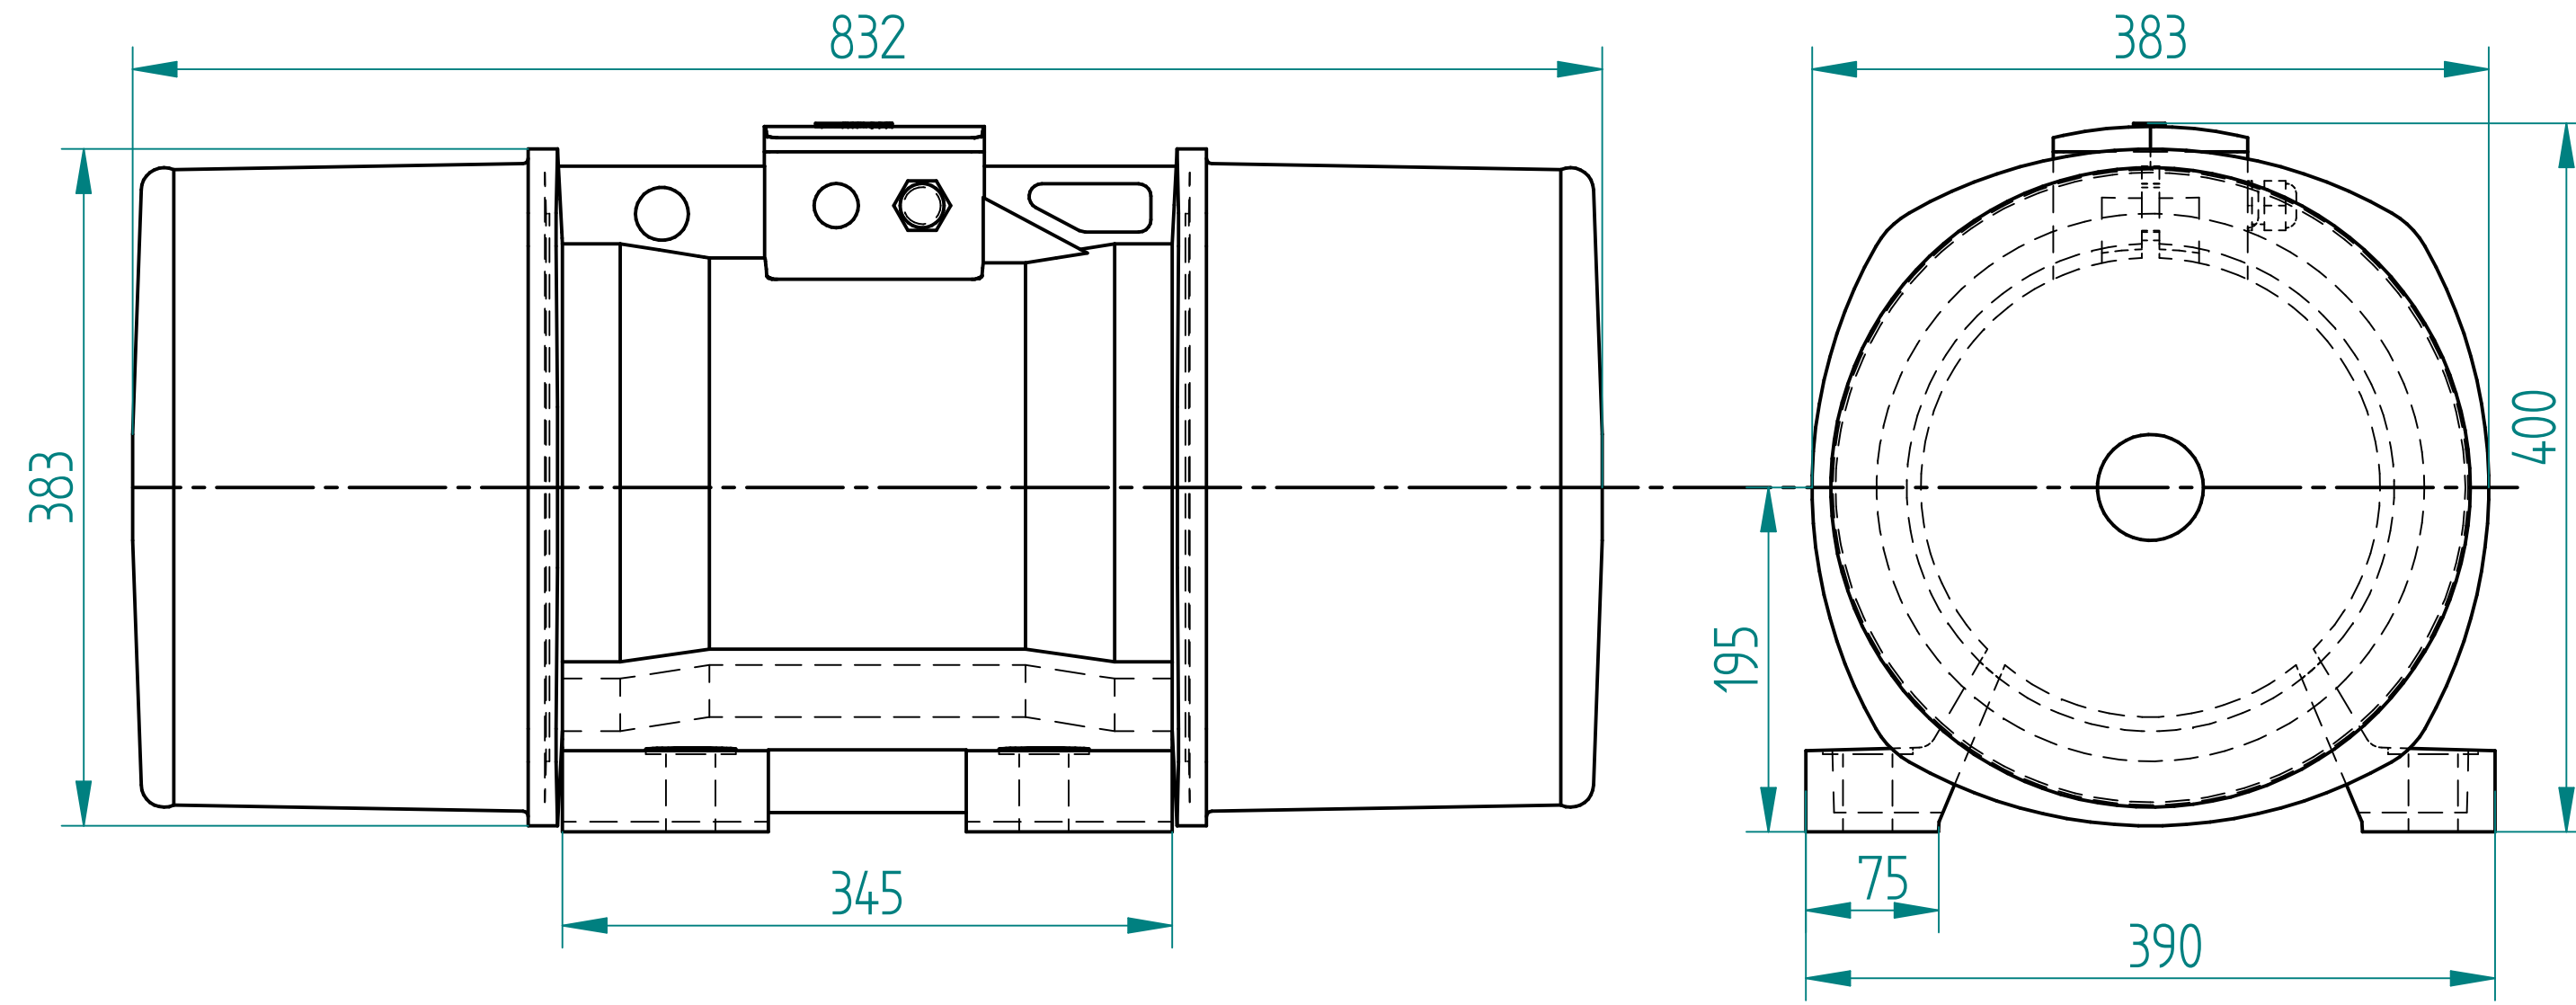