

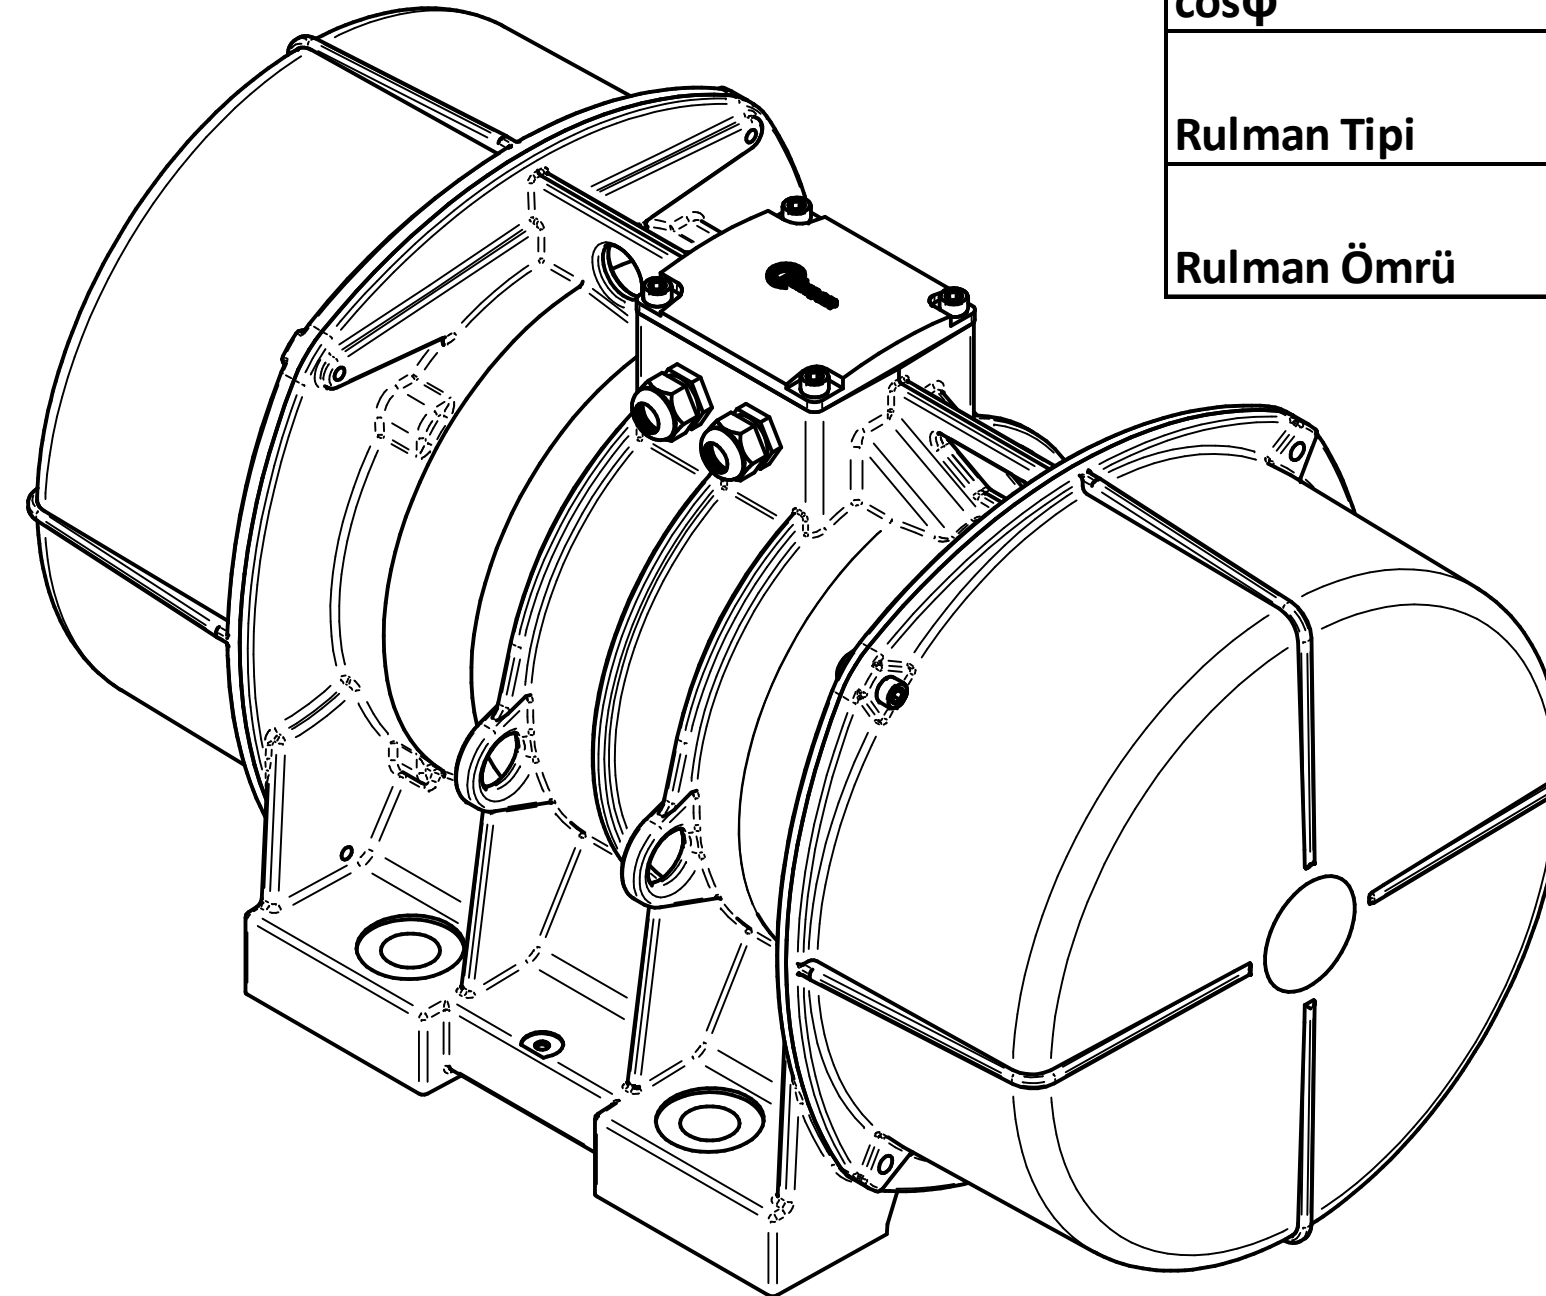
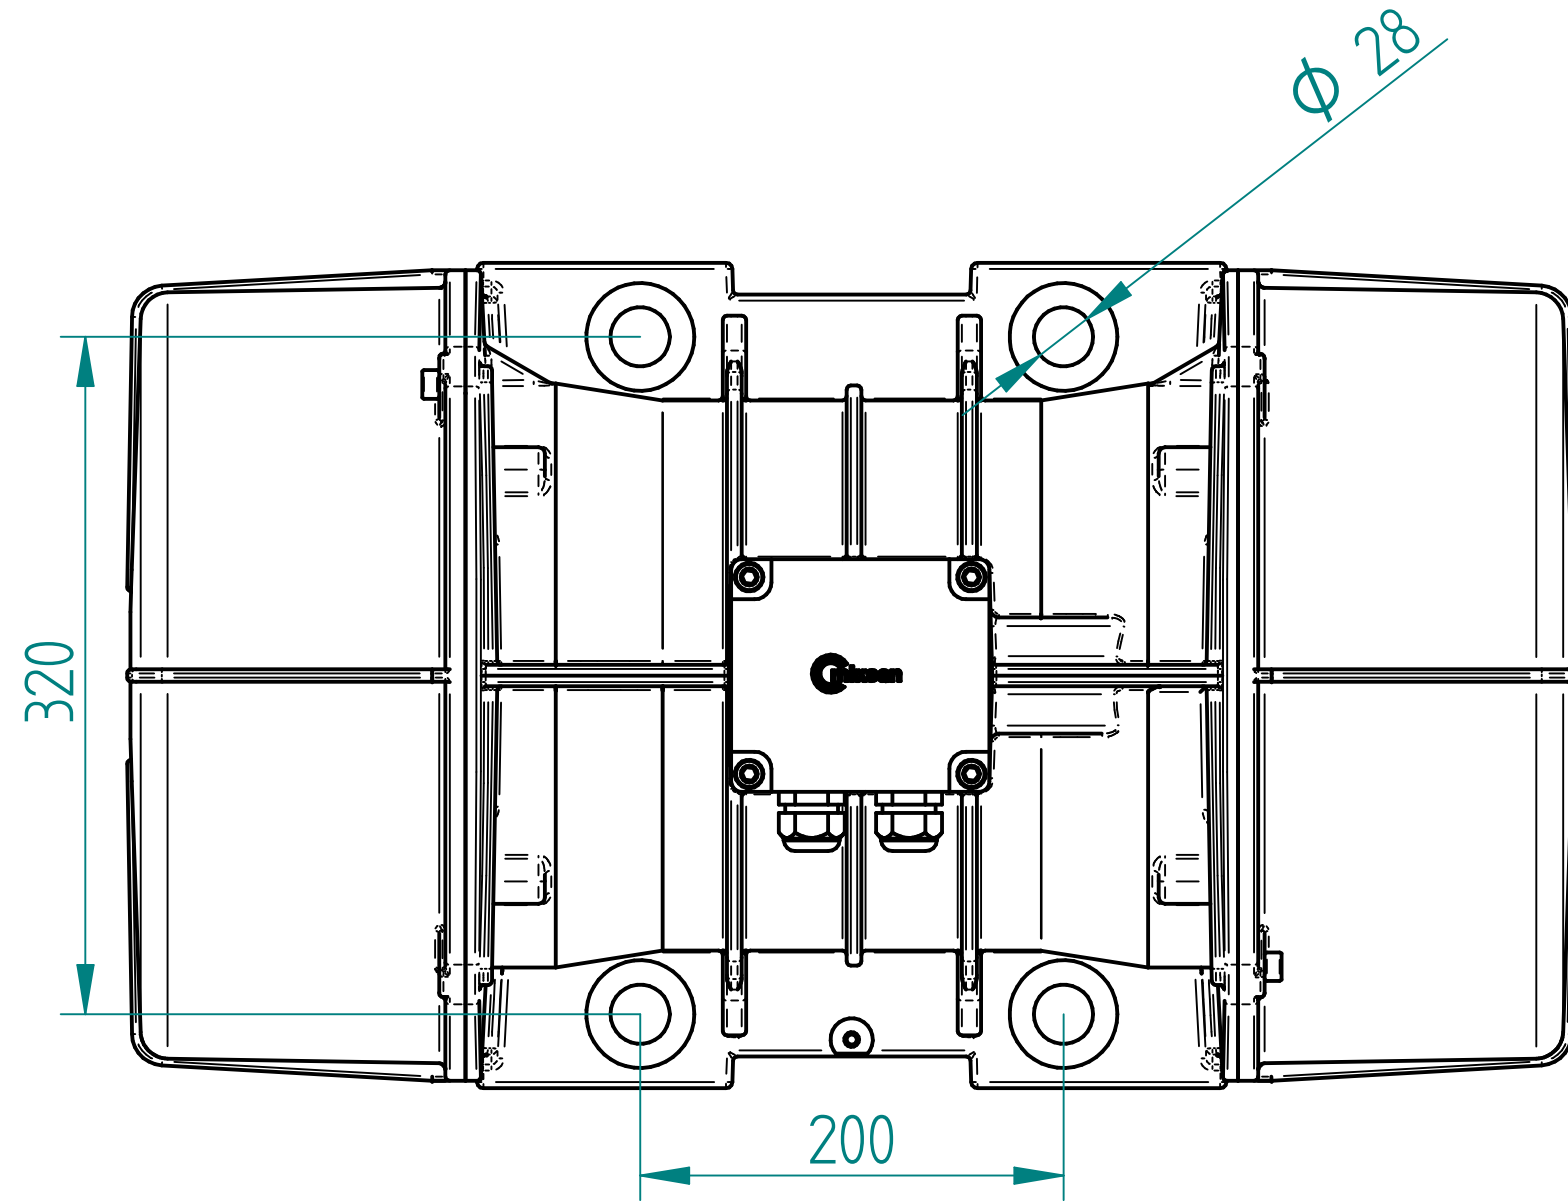


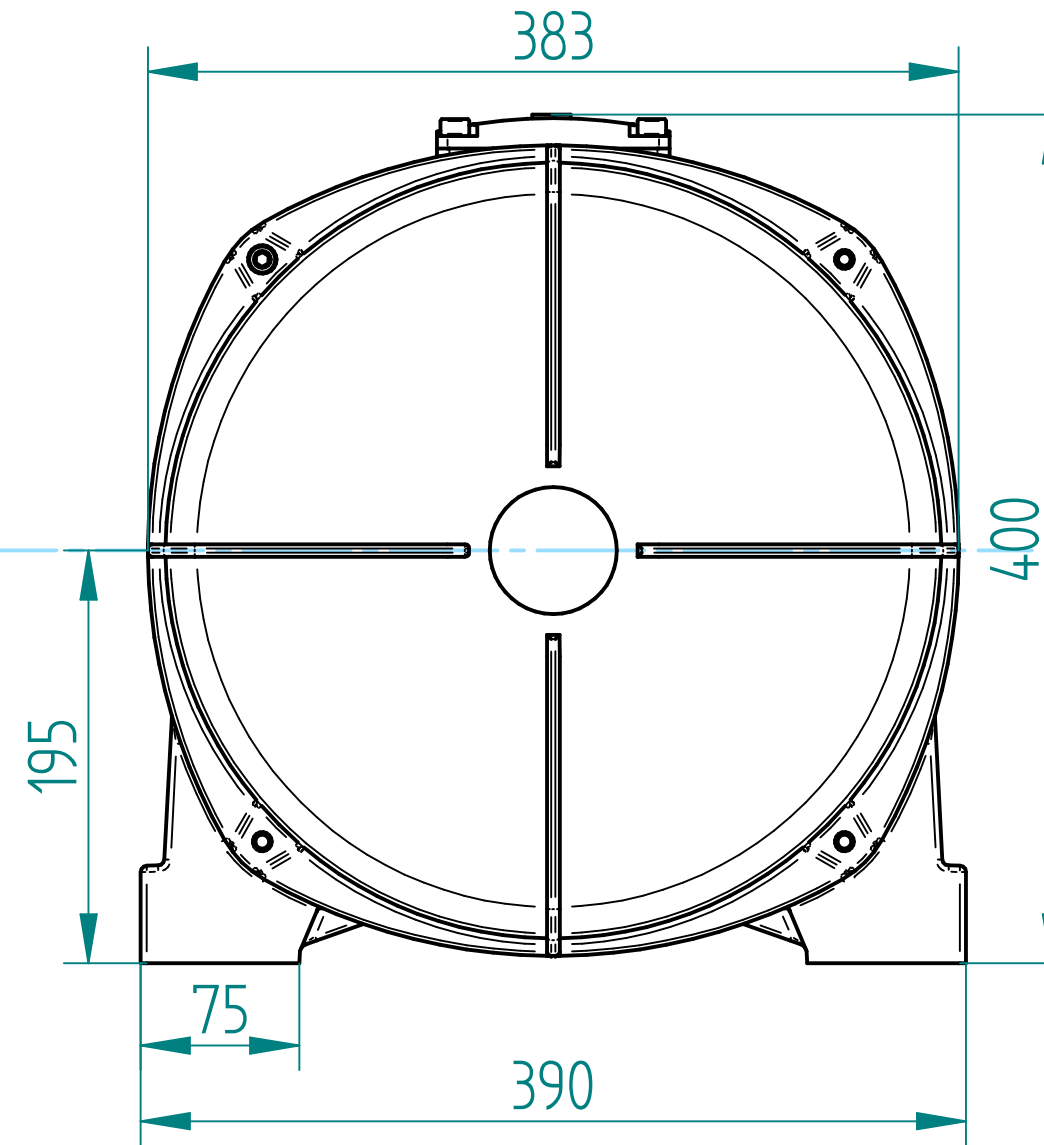

	VL 4-9000	
Statik moment	Static moment	3657 kgmm
Santrifüj Kuvveti	Centrifugal Force	9197 kg-90223 N
Frekans	Frequency	50 Hz
Ağırlık	Weight	206,0 kg
Devir	RPM	1500(50Hz)
Nominal gerilim	Nominal voltage	230/400 V
Maksimum akım	Max. Current	19,90/11,50 A
Maks. Giriş Gücü	Max.Input Power	7,0 kW
Faz	Phase	3
Mak. Ortam sıcaklığı	Max.Amb.	40 C
Koruma Sınıfı	Safety Class	IP 66
cosφ	cosφ	0,71
Rulman Tipi	Bearing Type	NJ 2315-E-TVP2-C4
Rulman Ömrü	Life Bearing	6500 saat (hours)

BOSB Bakır ve Pirinç Sanayicileri Sitesi
Menekşe Cad.No:1
Beylikdüzü / İstanbul
Tel :(+90) 212 284 6400
Fax :(+90) 212 279 5567
E-mail:info@miksanmotor.com
Web :www.miksanmotor.com

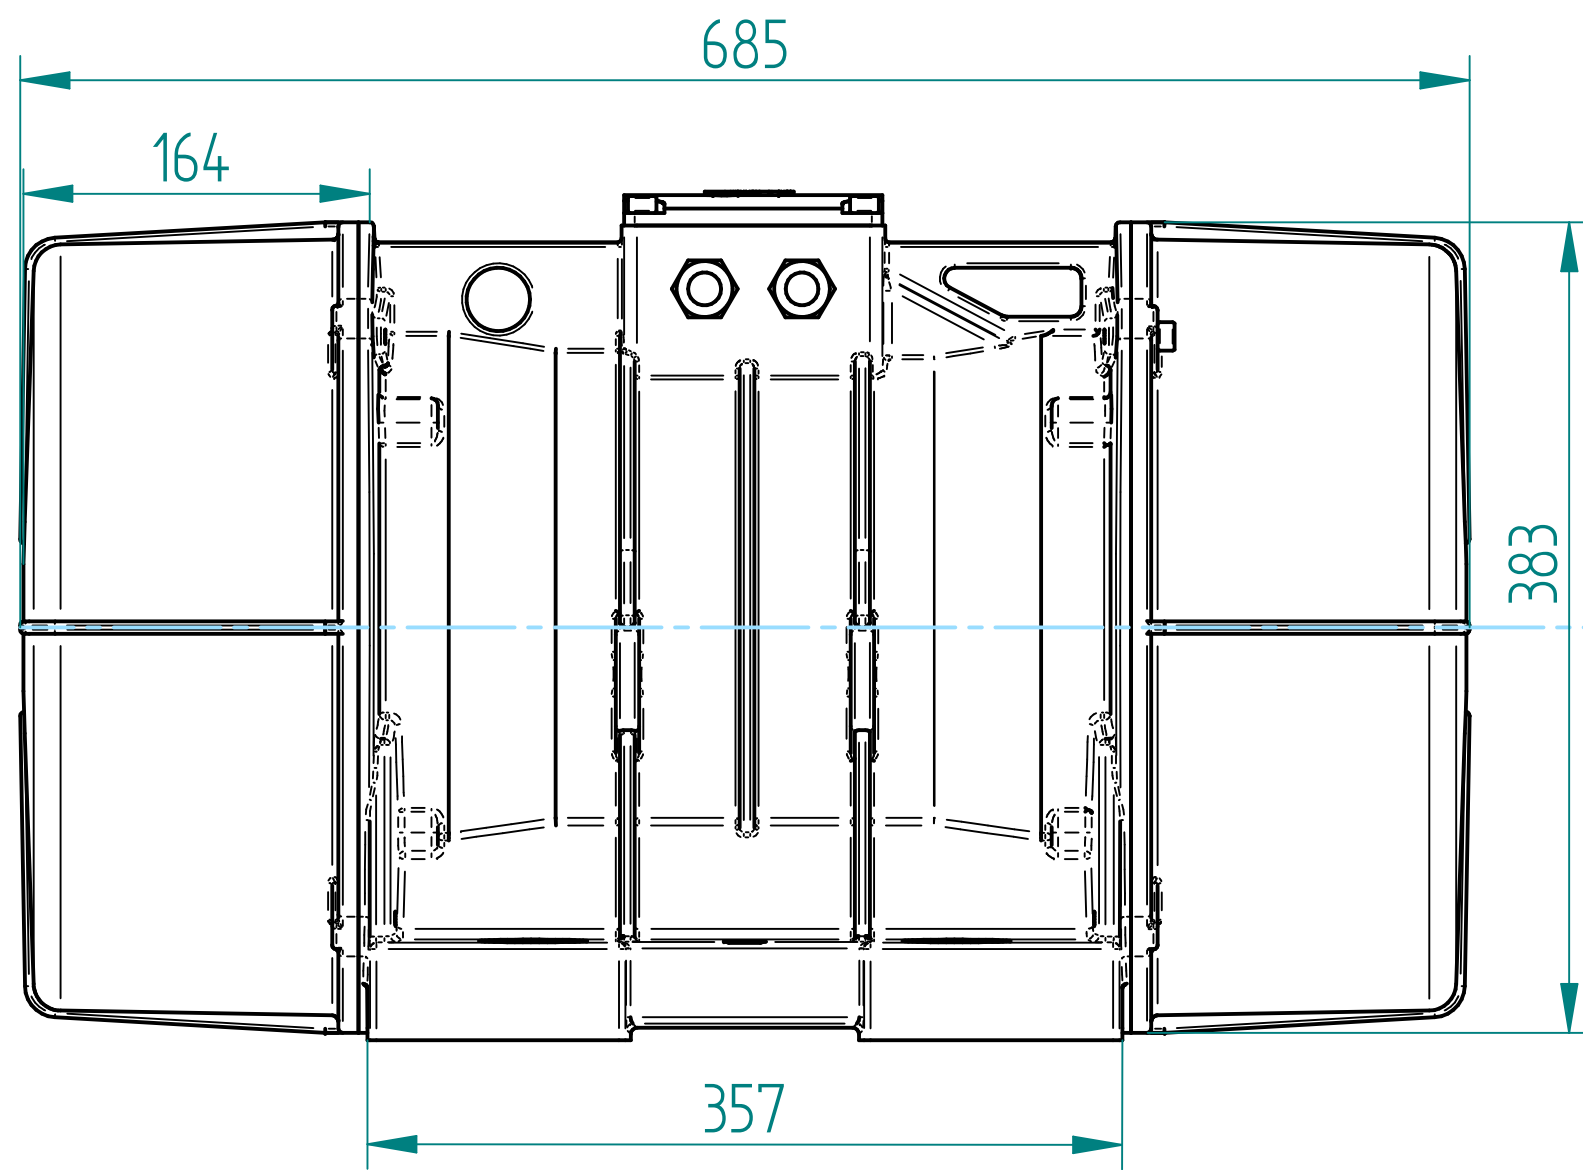