

MIKSAN 80 4B IE3 FX SERIES EX-PROOF



3-Phase 400V 50Hz

Duty Type : S1

Degree of protection : IP65

Insulation Class : F (155°C)

Mounting : B3

ELECTRICAL DESIGN

Rated power(W) : 750

Speed(rpm) : 1435

Rated current(A) : 2,20

Torque –Mn(Nm) : 5,00

Cos ϕ : 0,65



LOCKED ROTOR TORQUE

Locked rotor Current– Ia(A) : 13,0

Ia / In : 5,90

Locked rotor Torque- Ma(Nm) : 16,8

Ma / Mn : 3,36

MECHANICAL DESIGN

Frame : Aluminum

End Shields : Aluminum

Cooling Fan : 80 Frame

Terminal Box : - 3m Cable

Cable gland : M20x1,5 EX

Bearing Arrangement

Drive End

Non Drive End

6204 ZZ

6204 ZZ


:

Paint

: None

Weight

: 9,7 kg

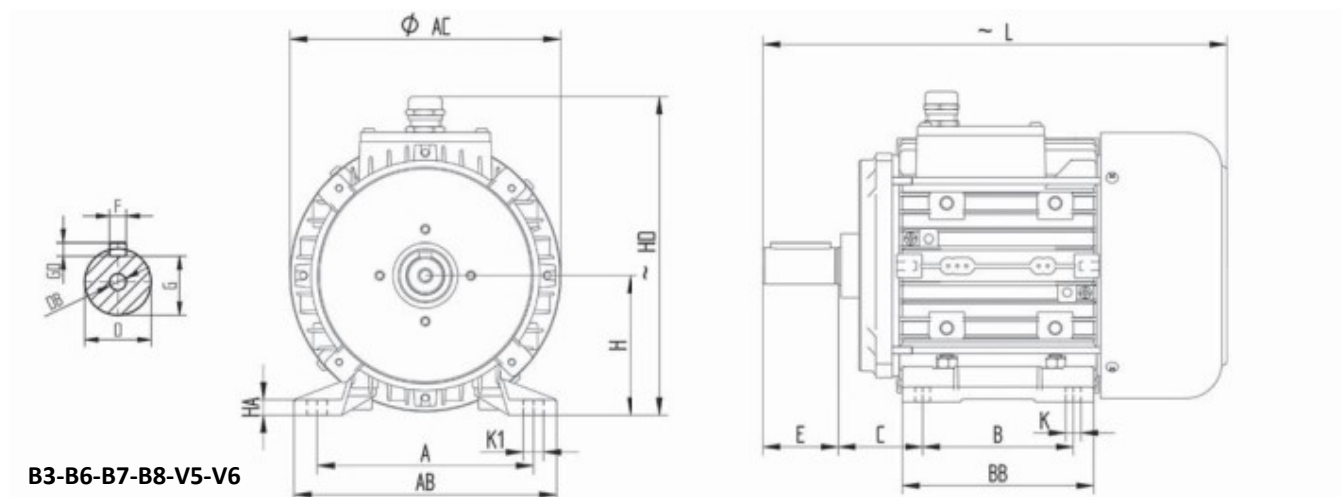

B3-B6-B7-B8-V5-V6

L	H	HD~	A	AB	øAC	B	BB	K	K1	C	E	øD	øDB	GA	FxGD
273	80	188	125	152	157	100	129	10	13	50	40	19	M6	21.5	6x6