

MIKSAN 132M 4A TX SERIES EX-PROOF




3-Phase 400V 50Hz

Duty Type : S1
Degree of protection : IP65
Insulation Class : F (155°C)
Mounting : B3

ELECTRICAL DESIGN

Rated power(W) : 7500
Speed(rpm) : 1460
Rated current(A) : 15,90
Torque –Mn(Nm) : 49,10
Cos ϕ : 0,76

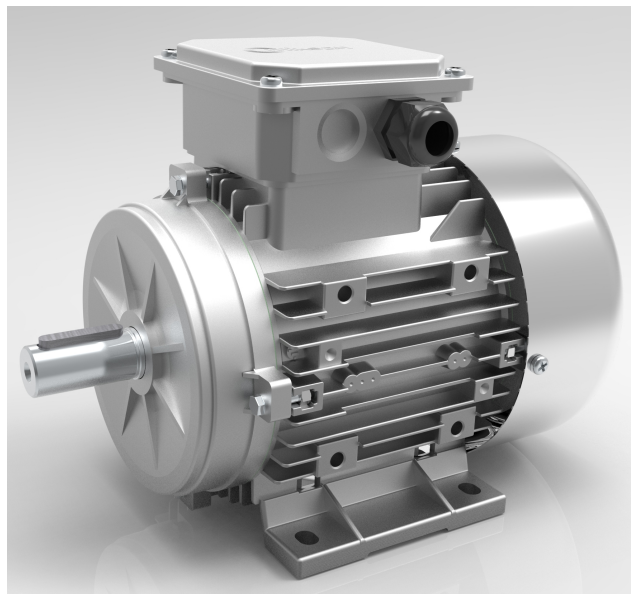

LOCKED ROTOR TORQUE

Locked rotor Current– Ia(A) : 111,30
Ia / In : 7,0
Locked rotor Torque- Ma(Nm) : 108,02
Ma / Mn : 2,2

MECHANICAL DESIGN

Frame : Aluminum
End Shields : Aluminum
Terminal Box : Aluminum
Cable gland : M25x1,5 EX

BEARING ARRANGEMENT

Drive End


6208 ZZ C3

Non Drive End

6208 ZZ C3

Paint : None

Weight : 51,4 kg

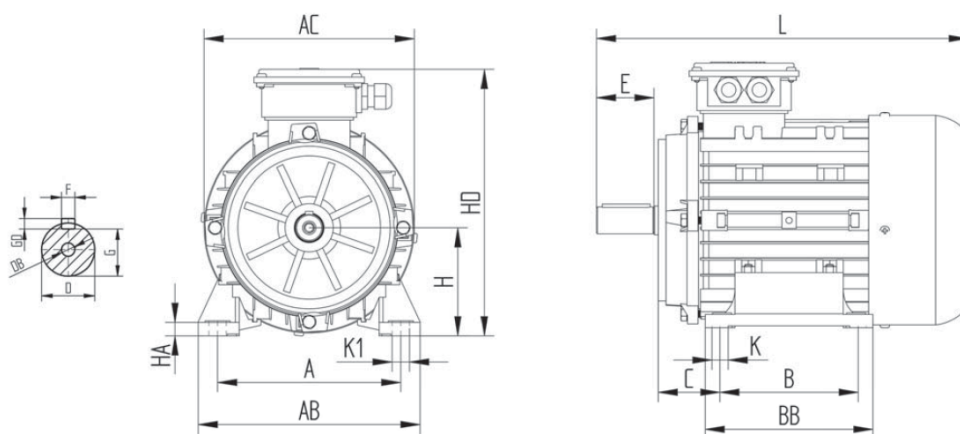

L	H	HD~	A	AB	AC	B	BB	K	K1	HA	C	E	D	DB	GA	FxGD
463	132	328	216	260	258	178	218	12	28	16	89	80	38	M12	41	10x8

IEP 18 ATEX 0584

II 3D Ex tC IIIC T135°C DC,IP65