

MIKSAN 63 4B B5 TX SERIES EX-PROOF



3-Phase 400V 50Hz

Duty Type : S1
Degree of protection : IP65
Insulation Class : F (155°C)
Mounting : B5

ELECTRICAL DESIGN

Rated power(W) : 180
Speed(rpm) : 1330
Rated current(A) : 0,75
Torque –Mn(Nm) : 1,30
Cos ϕ : 0,68
Efficiency (%) : 64,7

LOCKED ROTOR TORQUE

Locked rotor Current– Ia(A) : 2,25
Ia / In : 3,0
Locked rotor Torque- Ma(Nm) : 2,47
Ma / Mn : 1,9

MECHANICAL DESIGN

Frame : Aluminum
End Shields : Aluminum
Terminal Box : Aluminum
Cable gland : M20x1,5

BEARING ARRANGEMENT

Drive End



6202 ZZ C3

Non Drive End

6202 ZZ C3

Paint : None

Weight : 5,1 kg

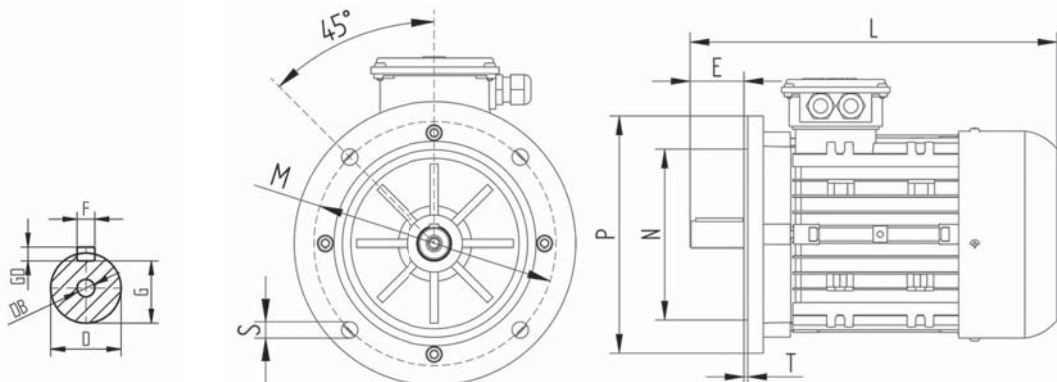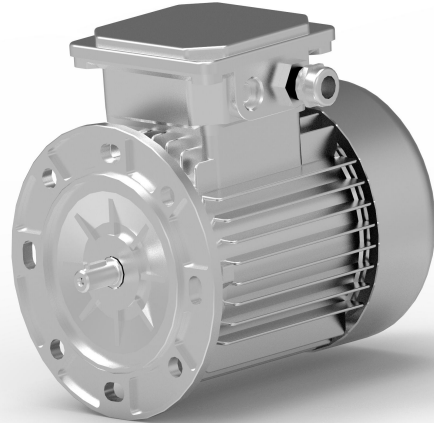

L	H	HD~	øAC	P	N	M	T	S	AD	E	øD	øDB	GA	FxGD
210	63	168	124	140	95	115	3	10	105	23	11	M4	12.5	4x4

IEP 18 ATEX 0584

II 3D Ex tc IIIC T135°C Dc,IP65