

MIKSAN 90S 4A TX SERIES EX-PROOF



3-Phase 400V 50Hz

Duty Type : S1

Degree of protection : IP65

Insulation Class : F (155°C)

Mounting : B5

ELECTRICAL DESIGN


Rated power(W) : 1100

Speed(rpm) : 1420

Rated current(A) : 2,80

Torque –Mn(Nm) : 7,40

Cos ϕ : 0,73

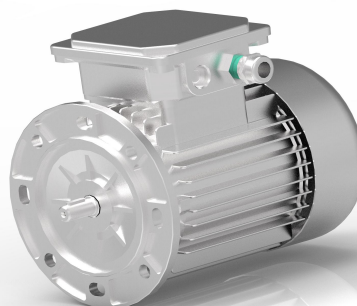

LOCKED ROTOR TORQUE

Locked rotor Current– Ia(A) : 15,40

Ia / In : 5,5

Locked rotor Torque- Ma(Nm) : 20,72

Ma / Mn : 2,8

MECHANICAL DESIGN

Frame : Aluminum

End Shields : Aluminum

Terminal Box : Aluminum

Cable gland : M20x1,5 EX

BEARING ARRANGEMENT

Drive End


6205 ZZ C3

Non Drive End

6205 ZZ C3

Paint : None

Weight : 14,1 kg

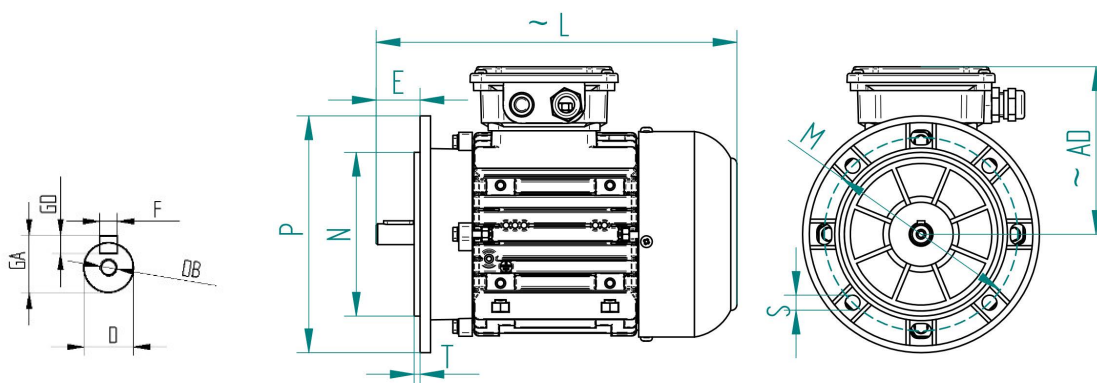

B5-V1-V3

L	H	HD~	P	N	øAC	M	T	S	AD	C	E	øD	øDB	GA	FxGD
305	90	-	200	130	175	165	3.0	12	139	-	50	24	M8	27	8x8