


MIKSAN 90L 4B TX SERIES EX-PROOF



3-Phase 400V 50Hz	
Duty Type	: S1
Degree of protection	: IP65
Insulation Class	: F (155°C)
Mounting	: B5

ELECTRICAL DESIGN

Rated power(W)	: 1500
Speed(rpm)	: 1415
Rated current(A)	: 3,55
Torque –Mn(Nm)	10,1
Cos ϕ	: 0,75

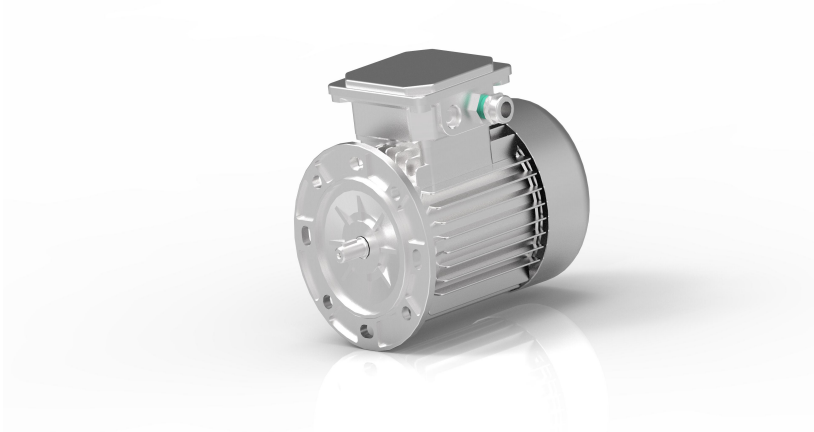

LOCKED ROTOR TORQUE


Locked rotor Current– Ia(A)	21,3
Ia / In	6,0
Locked rotor Torque- Ma(Nm)	: 26,26
Ma / Mn	: 2,6

MECHANICAL DESIGN

Frame	: Aluminum
End Shields	: Aluminum
Terminal Box	: Aluminum
Cable gland	: M20x1,5 EX

BEARING ARRANGEMENT

Drive End	Non Drive End
6205 ZZ C3	6205 ZZ C3
Paint	: None
Weight	: 16.7 kg

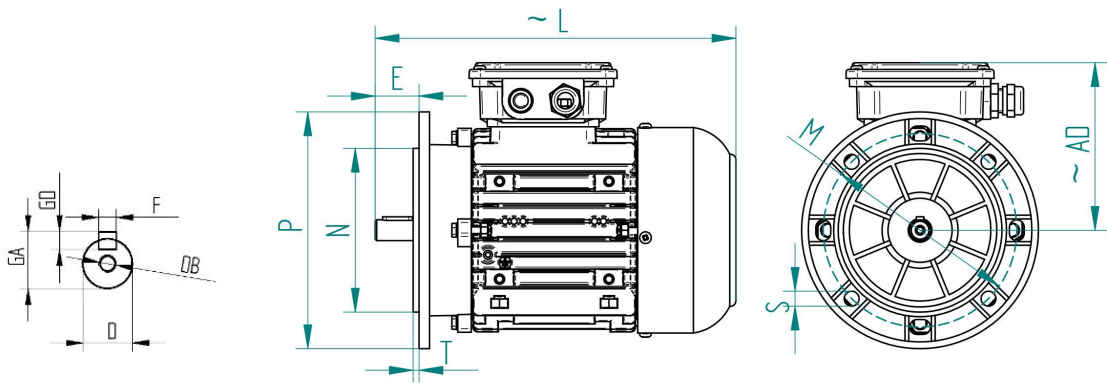

B5-V1-V3

L	H	HD~	P	N	øAC	M	T	S	AD	C	E	øD	øDB	GA	FxGD
333	90	-	200	130	175	165	3.0	12	139	-	50	24	M8	27	8x8