

MIKSAN 132S 2B IE3 EX SERIES EX-PROOF



3-Phase 400V 50Hz

Duty Type	: S1
Degree of protection	: IP66
Insulation Class	: F (155°C)
Mounting	: B14

ELECTRICAL DESIGN

Rated power(W)	: 7500
Speed(rpm)	: 2925
Rated current(A)	: 13,50
Torque –Mn(Nm)	: 24,50
Cos ϕ	: 0,90
Efficiency (%)	: 90,1

LOCKED ROTOR TORQUE



Locked rotor Current– Ia(A)	: 86,40
Ia / In	: 6,4
Locked rotor Torque- Ma(Nm)	: 56,35
Ma / Mn	: 2,3

MECHANICAL DESIGN



Frame	: Aluminum
End Shields	: Aluminum
Terminal Box	: Aluminum
Cable gland	: M25x1,5 EX

BEARING ARRANGEMENT

Drive End		
6308 ZZ C3	Paint	: None
Non Drive End	Weight	: 52,8 kg
6308 ZZ C3		

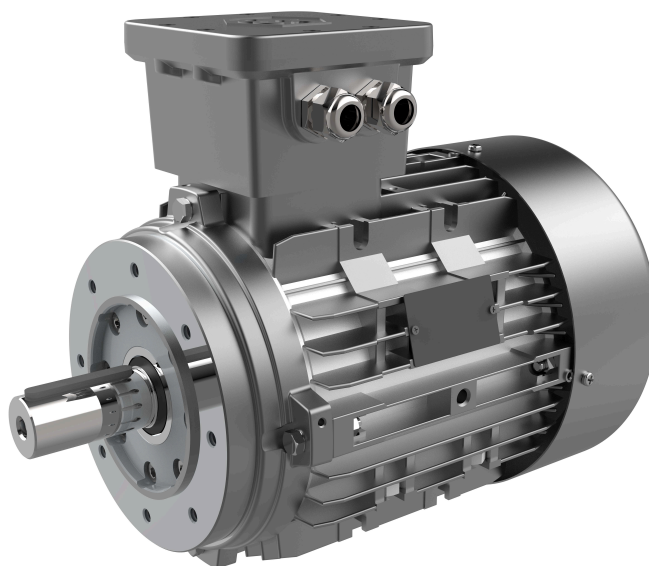

B3-B6-B7-B8-V5-V6

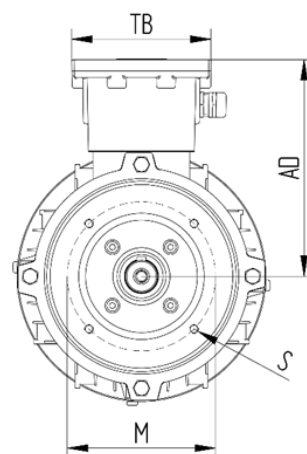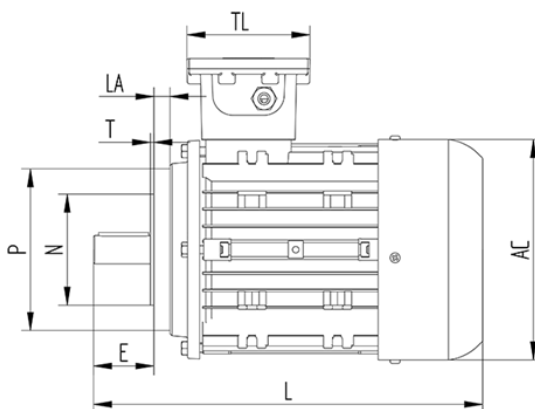

L	P	N	M	T	ϕ AC	LA	S	AD	TB/TL	E	ϕ D	ϕ DB	GA	FxGD
462	200	130	165	3.5	258	20.0	M10	226	150	80	38	M12	41	10x8

IEP 16 ATEX 0433X

II 2G Ex db IIC T4 Gb

II 2D Ex tb IIIC T120°C Db,IP66