

MIKSAN 112 4A EX SERIES EX-PROOF



3-Phase 400V 50Hz


Duty Type	: S1
Degree of protection	: IP66
Insulation Class	: F (155°C)
Mounting	: B5

ELECTRICAL DESIGN

Rated power(W)	: 4000
Speed(rpm)	: 1445
Rated current(A)	: 8,50
Torque –Mn(Nm)	: 26,50
Cos ϕ	: 0,81
Efficiency (%)	: 86,6

LOCKED ROTOR TORQUE

Locked rotor Current– Ia(A)	: 59,50
Ia / In	: 7,0
Locked rotor Torque- Ma(Nm)	: 55,65
Ma / Mn	: 2,1

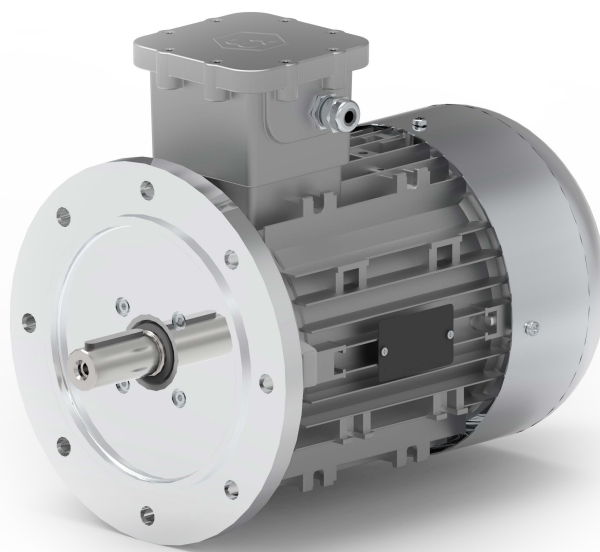


MECHANICAL DESIGN

Frame	: Aluminum
End Shields	: Aluminum
Terminal Box	: Aluminum
Cable gland	: M20x1,5 EX



BEARING ARRANGEMENT

Drive End
6206 ZZ C3
Non Drive End
6206 ZZ C3

Paint	: None
Weight	: 29,8 kg



B3-B6-B7-B8-V5-V6

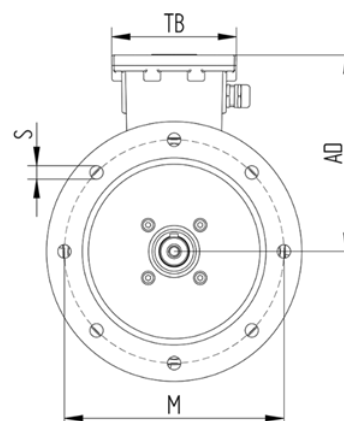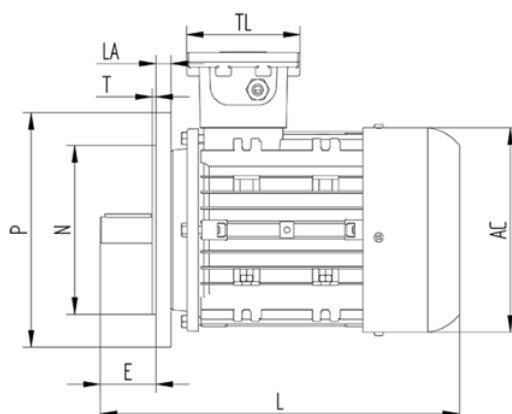

L	P	N	M	T	ϕ AC	LA	S	AD	TB/TL	E	ϕ D	ϕ DB	GA	FxGD
оут	нрл	мул	нмр	4.0	нму	16.0	13	мфл	122	60	28	M10	31	8x8

IEP 16 ATEX 0433X

II 2G Ex db IIC T4 Gb

II 2D Ex tb IIIC T120°C Db,IP66