



JB 350 PUMP

Applications:

- Cutting, turning, milling, boring, grinding and similar applications of the machine tools,
- Filtration systems,
- Treatment systems,
- Cooling systems,
- Circulation systems. JB Pumps are used for pumping of cutting / cooling fluids.

Fluid Specifications:


- Coolants,
- Cutting oils,
- Grinding oils,
- Water,
- Chip contains liquids (max. 10mm)
- Fluid temperature 0...80 °C
- Kinematic viscosity 1...90 mm²/s

Materials:


Pump body	: Cast iron - DIN GG 25
Volute	: Cast iron - DIN GG 25
Diffusor	: Cast iron - DIN GG 25
Suction Cover	: Cast iron - DIN GG 25
Impeller	: Investment casting steel - AISI 4140 (DIN 42CrMo4)
Pump shaft	: Engineering steel - AISI 1040 (DIN C35)
Electric motor	: 3 phase induction motor IE3 - 2 pole Protection degree IP 55

* JB 350 pumps can be optionally equipped with an axial impeller.

** Please contact us for different immersion depth.

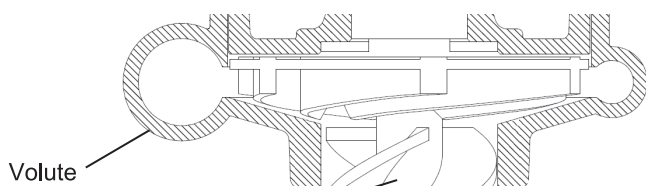


JBA 350 - Axial front impeller

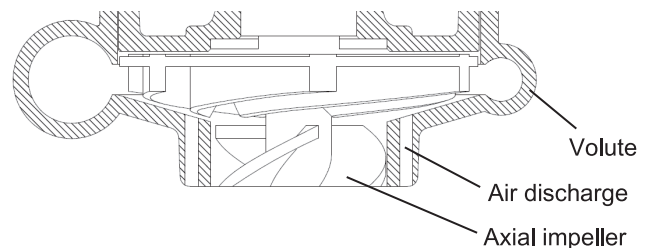

JBH 350 - Axial front impeller
with air release

DIMENSIONS & NOMINAL VALUES

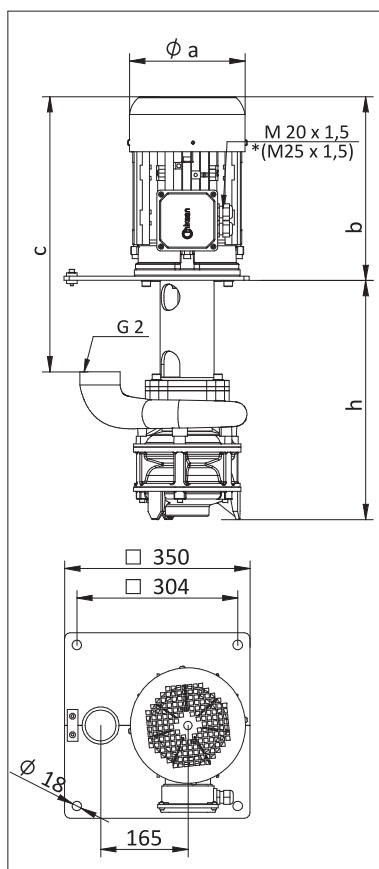

TYPE	Depth of Immersion h (mm)	Weight			kg	Power kW	Voltage V(Δ/Y)	Frequency Hz	Rated current A	Speed rpm
		a	b	c						
		mm								
JB 351/300	300	176	299	471	43.5	2.2	230/400	50	7.79/4.5	2905
JB 351/520	520			519	50.0					
JB 351/740	740			567	56.5					
JB 352/375	375	194	338	510	58.5	4.0	230/400	50	13.68/7.9	2900
JB 352/595	595			730	65.0					
JB 352/815	815			950	71.5					
JB 353/450	450	258	438	610	93.0	7.5	400Δ	50	14.0	2930
JB 353/670	670			830	99.5					
JB 354/525	525	258	438	610	109.0	11.0	400Δ	50	19.7	2930
JB 354/745	745			830	115.5					

* The performance curves are based on 1 mm²/s (cSt) kinematic viscosity values and 997 kg/m³ density

** Curve tolerance according to ISO 9906:2012 Grade 3B.

Performance Curve

